





- Rubber grip collet for push type or draw type collet chucks.
- Full gripping area: high rigidity, more gripping force. Gripping smoothly: prevent to damage the workpiece.
- More accurate than standard spring collets. Accuracy: With customized rubber grip collet, the accuracy can reach $\pm 10\mu\text{m}$.
- Grip Range: $\pm 0.5\text{mm}$.
- Quick change and easy.
- Dust-proof and swarf-proof design.

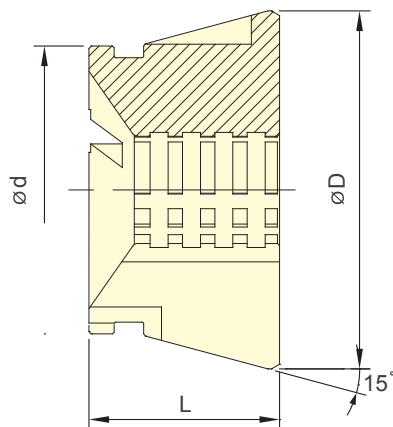

RG-RT

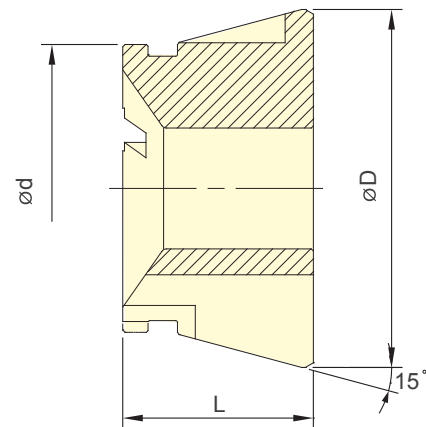


RG-R

Subject to technical changes

SPECIFICATIONS

Model	Max. Chucking Capacity		d	D	L	Matching Collect Chuck
	Round	mm				
RG-42R	4~42		54	79.3	42	CB-42,CBE-42
RG-42RT	4~42		54	79.3	42	CB-42,CBE-42
RG-52R	4~52		66	79.3	46	CB-52,CBD-52,CBE-52, SCB-52
RG-52RT	4~52		66	79.3	46	CB-52,CBD-52,CBE-52, SCB-52
RG-65R	4~65		80	99.5	53	CB-65,CBD-65,CBE-65, SCB-65
RG-65RT	4~65		80	99.5	53	CB-65,CBD-65,CBE-65, SCB-65

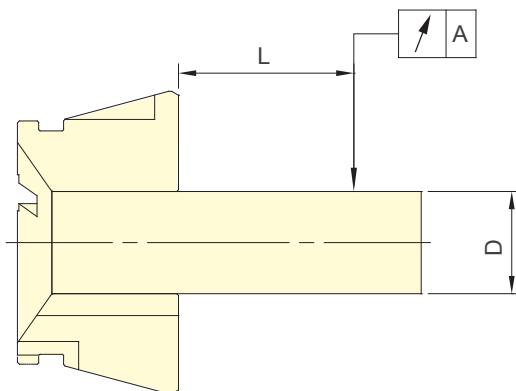

Test Bar D(S,H)	L	A DIN	
	mm	Class1	Class2
3.0~6.0	16	0.015	0.020
6.0~10.0	25	0.015	0.020
10.0~18.0	40	0.020	0.030
18.0~24.0	50	0.020	0.030
24.0~30.0	60	0.020	0.030
30.0~50.0	80	0.030	0.040
50.0~60.0	100	0.030	0.040

Note1 : Collets chuck are conformed to DIN 6343 Class2.

Note2 : AUTOGRIP's rubber grip collets are conformed to DIN 6343 Class1.