



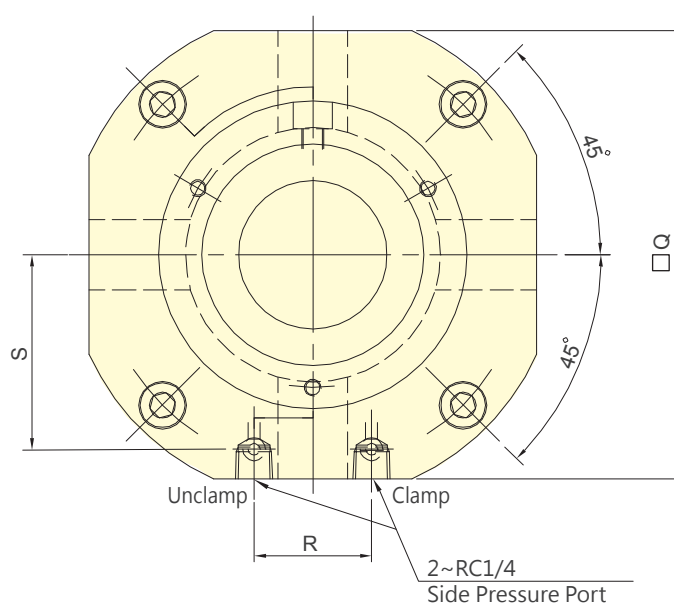

- Build-in cylinder, ideal for drilling machines, milling machines and machining centers
- Work with Autogrip's rubber collet(RG series), quick change and saving runtime.
- Two modes for the media supply: side-supply mode or baseplate-supply mode.

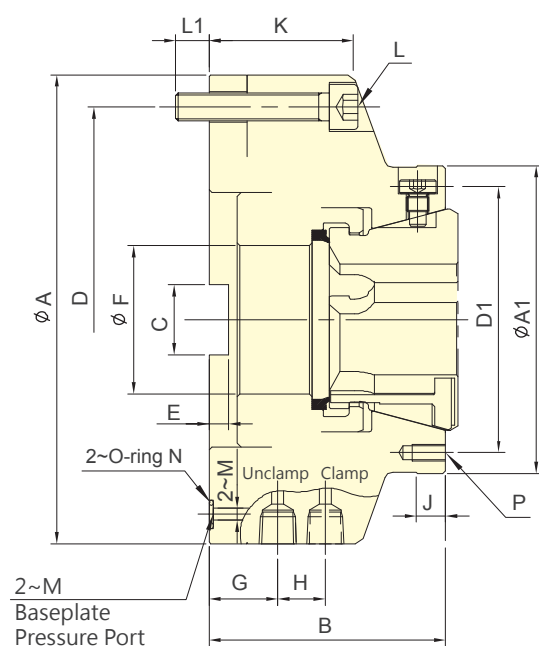

Subject to technical changes

SPECIFICATIONS

Model	Jaw stroke(Dia.) mm	Max. Chucking Capacity			Max. clamping force kN (kgf)	Weight (kg)	Matching steel collet	Max. pressure MPa (kgf/cm ²)
		Round mm	Hexagom mm	Square mm				
SCB-52	± 0.5	4~52	7~45	7~36	80(8150)	8.6	RG-52	4.0(40)
SCB-65	± 0.5	4~65	8~56	8~46	105(10700)	10.2	RG-65	4.2(42)

DIMENSIONS

Model	A (g6)	A1	B	C	D	D1	E	F	G	H
SCB-52	175	110	84.5	25	152	95	7	53	24.5	17
SCB-65	192	130	94	30	169	114	9	66	26.5	20

Model	J	K	L	L1	M	N	P	Q	R	S
SCB-52	10	51.5	4~M10	12	4.2	P7	3~M6x12	160	42	69.5
SCB-65	10	61.5	4~M10	12.5	4.2	P7	3~M6x12	175	50	77