



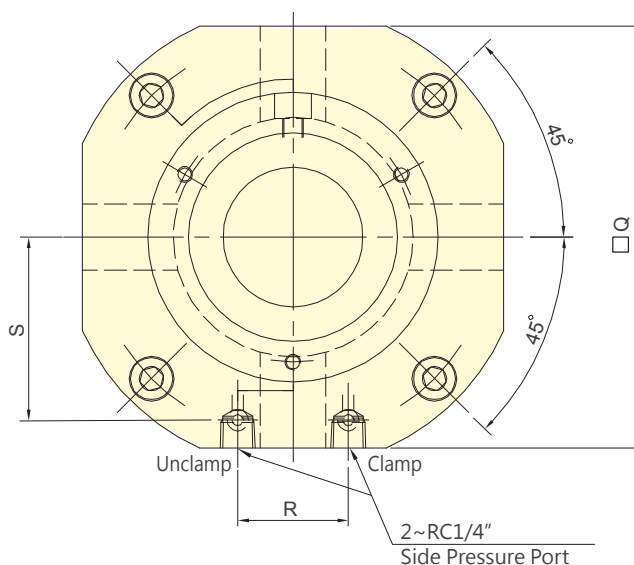

- Build-in cylinder, ideal for drilling machines, milling machines and machining centers
- Work with AUTOGRIP's rubber collet(RG series), quick change and saving runtime.
- Two modes for the media supply: side-supply mode or baseplate-supply mode.

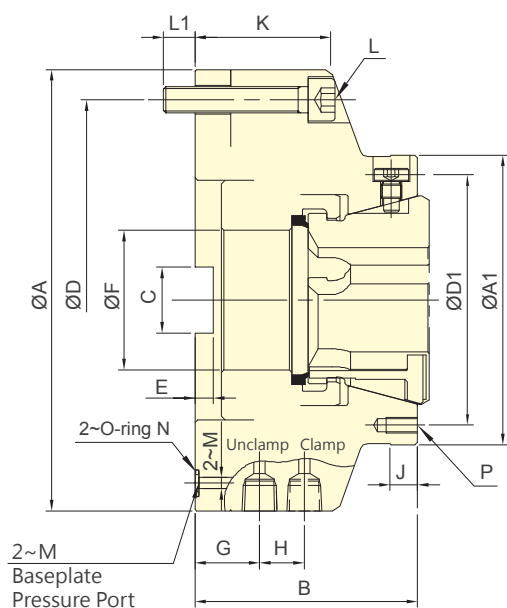

Subject to technical changes

## SPECIFICATIONS

| Model  | Jaw stroke<br>(Dia.)<br>mm | Max. Chucking Capacity |         |        | Max. clamping<br>force<br>Pneumatic<br>kN (kgf) | Max. clamping<br>force<br>Hydraulic<br>kN (kgf) | Max. pressure<br>Pneumatic<br>MPa (kgf/cm <sup>2</sup> ) | Max. pressure<br>Hydraulic<br>MPa (kgf/cm <sup>2</sup> ) | Weight<br>kg | Matching steel<br>collet |
|--------|----------------------------|------------------------|---------|--------|-------------------------------------------------|-------------------------------------------------|----------------------------------------------------------|----------------------------------------------------------|--------------|--------------------------|
|        |                            | Round                  | Hexagom | Square |                                                 |                                                 |                                                          |                                                          |              |                          |
| SCB-52 | ± 0.5                      | 4~52                   | 7~45    | 7~36   | 8.2(837)                                        | 101(10300)                                      | 0.6(6)                                                   | 4.0(40)                                                  | 8.6          | RG-52                    |
| SCB-65 | ± 0.5                      | 4~65                   | 8~56    | 8~46   | 10(1020)                                        | 105(10700)                                      | 0.6(6)                                                   | 4.2(42)                                                  | 10.2         | RG-65                    |

## DIMENSIONS

| Model  | A (g6) | A1  | B    | C  | D   | D1  | E | F  | G    | H  |
|--------|--------|-----|------|----|-----|-----|---|----|------|----|
| SCB-52 | 175    | 110 | 84.5 | 25 | 152 | 95  | 7 | 53 | 24.5 | 17 |
| SCB-65 | 192    | 130 | 94   | 30 | 169 | 114 | 9 | 66 | 26.5 | 20 |

| Model  | J  | K    | L     | L1   | M   | N  | P       | Q   | R  | S    |
|--------|----|------|-------|------|-----|----|---------|-----|----|------|
| SCB-52 | 10 | 51.5 | 4~M10 | 12   | 4.2 | P7 | 3~M6x12 | 160 | 42 | 69.5 |
| SCB-65 | 10 | 61.5 | 4~M10 | 12.5 | 4.2 | P7 | 3~M6x12 | 175 | 50 | 77   |