


- Use for milling machine or machining center to achieve simultaneous processing of multiple workpieces.
- Stationary cylinder lock valve (optional) can be mounted.
- Plate for 2,3,6 stationary chucks is optional.

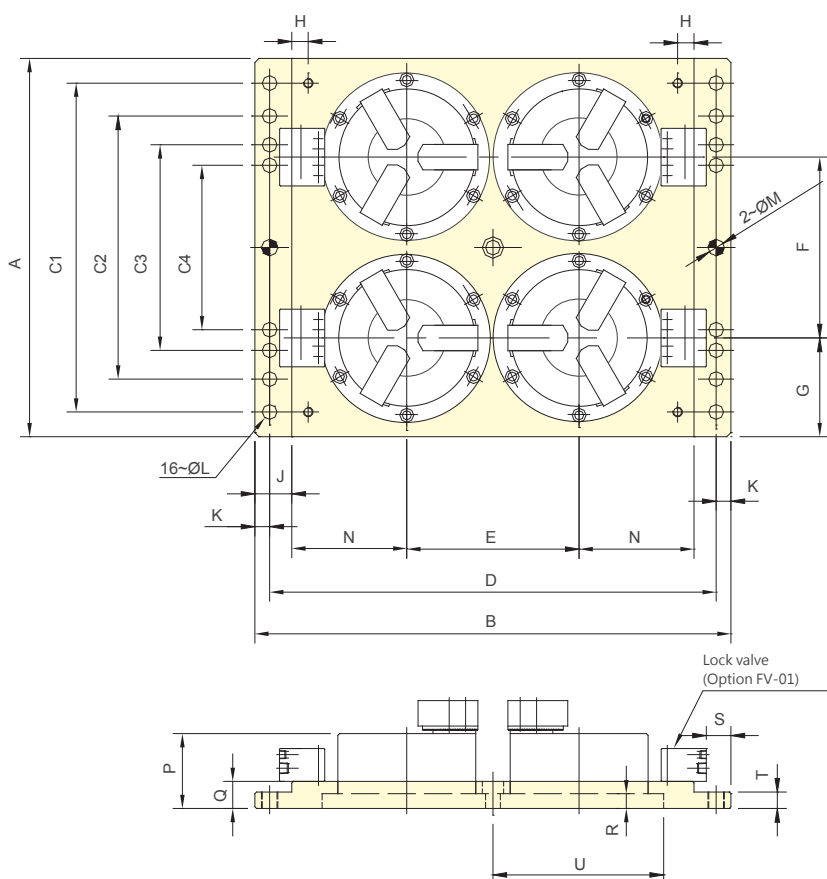

Subject to technical changes

DIMENSIONS

Model	A	B	C1	C2	C3	C4	D	E	F	G
MP4-06206	460	580	400	320	250	200	544	210	220	120

Model	H	J	K	L	M	N	P	Q	R	S	T	U
MP4-06206	20	45	18	17	20	140	*B	33	18	20	20	206

The dimension *B: Please refer to the dimension B of the chuck model assembled.



Subject to technical changes

Max. pressure MPa(kgf/cm ²)	Operating angle	Port size
1.0 (10)	90°	Rc1/4