



CT-SB/CT-SBS

COOLANT COLLECTOR WITH STROKE CONTROL



- The proximity switch and linear Sensor are optional.
- Drain port Ø40 and Ø60 are optional product.
- Drain port Ø60 only use to CT-S08B,CT-S10B,CT-S12B.



- The proximity switch is optional.

Power supply	Switching cap.	Output type
DC 10/30V	100mA	NPN


- Terminal Connections

+V	OP1	OV
BROWN	BLACK	BLUE

- linear Sensor installation drawing

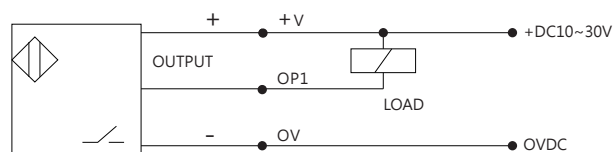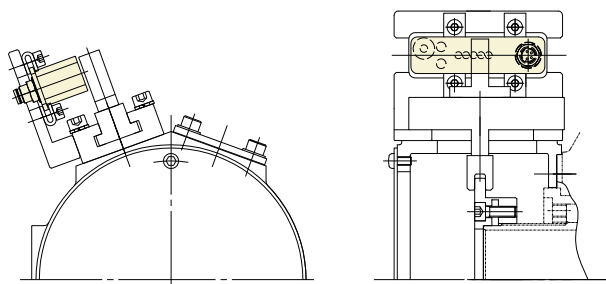


CT-SB

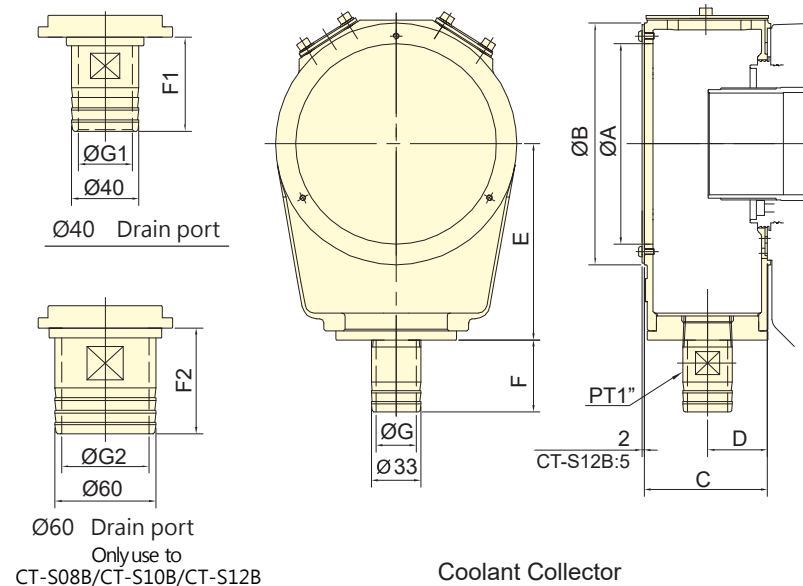

Coolant Collector

CT-SBS

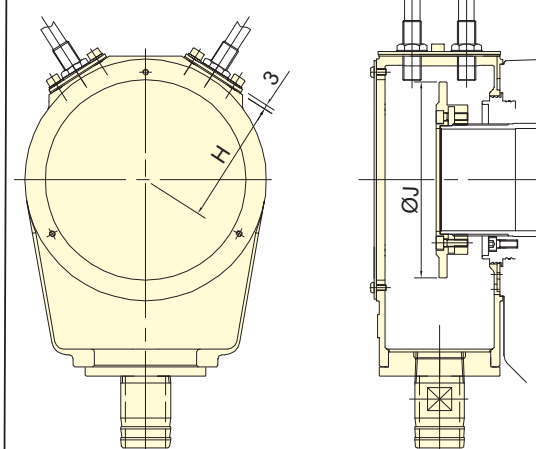

Coolant Collector with Detecting Ring

Subject to technical changes

DIMENSIONS

Model	A	B	C	D	E	F	F1	F2	G	G1	G2	H	J	Weight (kg)		Matching cyl.
														CT-SB	CT-SBS	
CT-S05B/CT-S05BS	97	120	68.3	33.3	96	49.6	56	-	25	32	-	62	86	1.1	1.6	TS-539, TR-539
CT-S08B/CT-S08BS	133	160	82	40	130	49.6	56	63	25	32	52	82	130	0.9	1.4	TS-866
CT-S10B/CT-S10BS	160	188	88	43	148	49.6	56	63	25	32	52	96	148	1.16	2.9	TS-1081
CT-S12B/CT-S12BS	205	234	87	43.5	171	49.6	56	63	25	32	52	121	190	4.3	5.6	TS-1210