




- 迴轉工作台上夾治具空油壓缸用迴轉分流閥。
- 迴轉閥內部經特殊設計，使得迴轉軸可輕力轉動，且不虞漏油。
- I型為一迴路，同時控制開夾動作。
- II型為二迴路，可分別控制開夾動作。
- Rotary valve is used for clamping cylinder on rotary table.
- Through unique design, it can make the rotary housing be rotated light force and is free from oil leaking.
- I Type is a single circuit which controls the clamping.
- II Type is a double circuit which separately controls the clamping.
- RV 型式的洩油孔配管務必單獨接回油槽，以避免產品背壓。
- The drain port of RV type should be independently connected to oil tank to avoid back pressure.

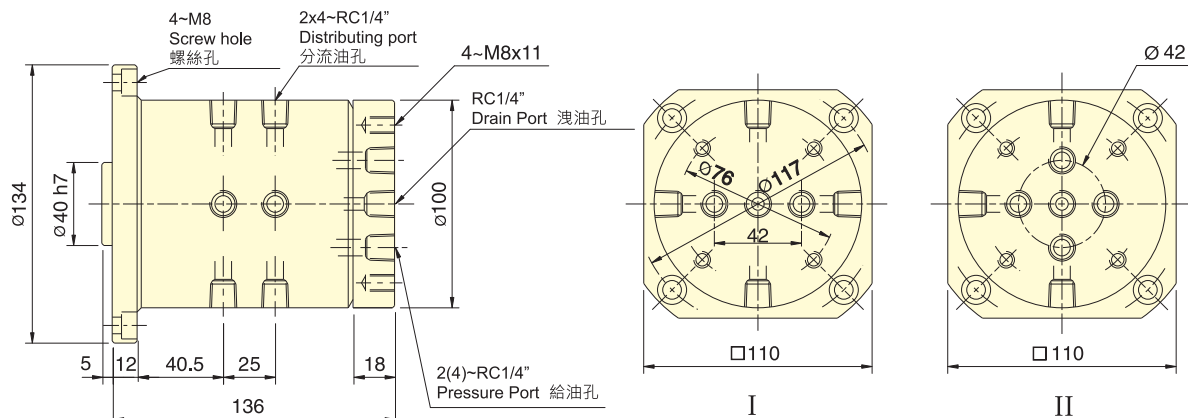


保留規格修改的權利  
Subject to technical changes

### 技術規格 SPECIFICATIONS

型號	分流數	最高使用壓力	重量
Model	Distributing	Max. pressure MPa(kgf/cm <sup>2</sup> )	Weight kgs
RV-31H	4 向 (可訂製)	4.0(40)	7.4

註:RV 可提供客製。(Note:RV can be custom-made.)

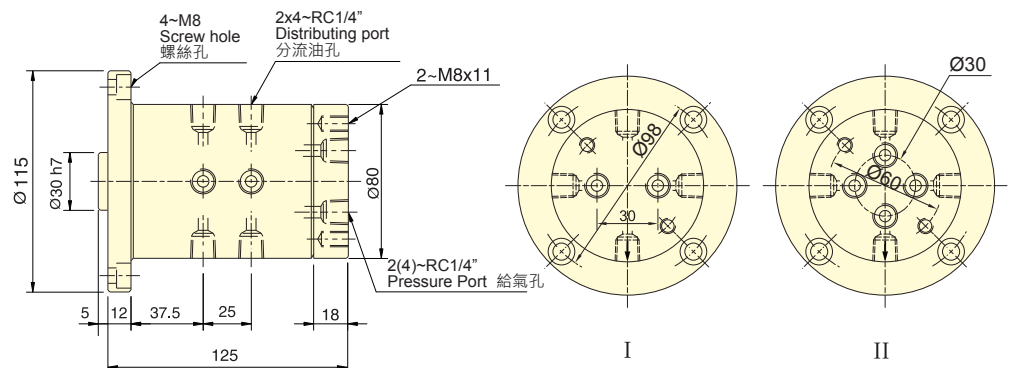

保留規格修改的權利  
Subject to technical changes

### 技術規格 SPECIFICATIONS

型號	分流數	最高使用壓力	重量
Model	Distributing	Max. pressure MPa(kgf/cm <sup>2</sup> )	Weight kgs
RV-A31H	4 向 (可訂製)	0.8(8)	4.8

註:RV-A 可提供客製。(Note:RV-A can be custom-made.)