



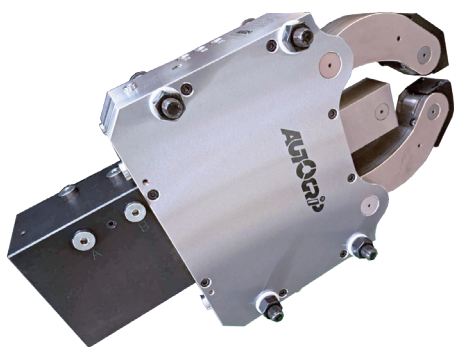

- Precision Type.
- Sealed body design for low maintenance.
- Programmable, suitable for automated assembly lines.
- Equipped with water/air sprays for debris, coolant-proof, and chip-proof.
- Range: 12-245mm.

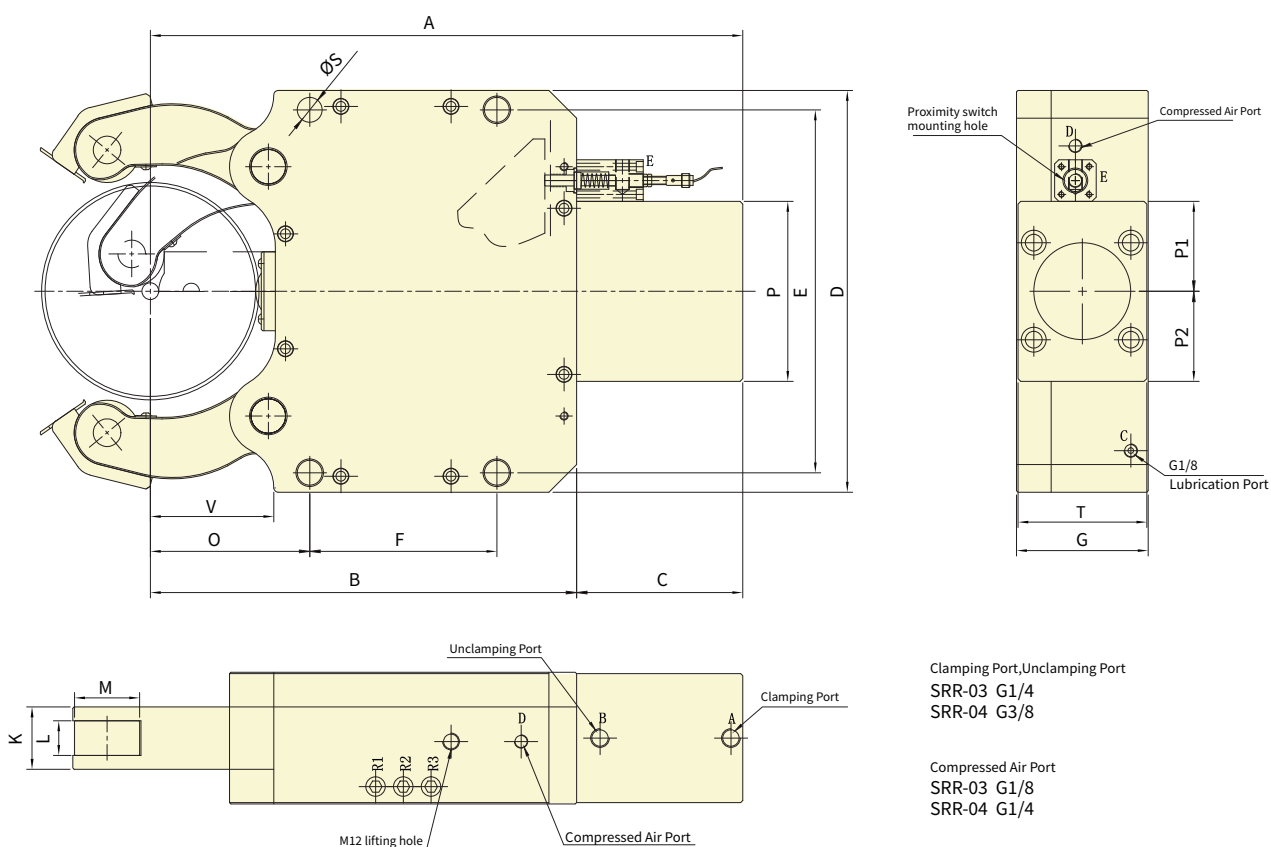

Subject to technical changes

SPECIFICATIONS

Model	Eff. piston area cm ²	Chuck Dia. Max. mm	Chuck Dia. Min. mm	Max. clamping force kN (kgf)	Max. roller surface speed M/min.	Max. pressure bar	Clamping accuracy mm	Repeat accuracy mm	clamping weight kg	Weight kg
SRR-03	38.5	152	12	10.2(1040)	750	65	0.04	0.007	1000	39
SRR-04	63.5	245	30	15(1529)	760	60	0.05	0.007	1500	98

DIMENSIONS

Model	A	B	C	D	E	F	G	O
SRR-03	427	307	120	290	262	135	95	115
SRR-04	603	448	155	405	365	240	110	146

Model	K	L (Width of rollers)	M (Diameter of rollers)	P	P1	P2	S	T	V
SRR-03	45	25	47	130	65	65	18	93	89
SRR-04	60	25	52	150	75	75	23	105	128