



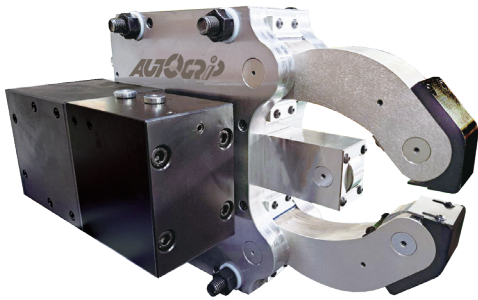

- Side-Mounted Hydraulic Cylinder Steady Rest.
- Fully Sealed Body, Low Maintenance.
- Optional Water/Air Jet for Chip Removal and Cooling Functionality.
- Compact Size and Structure.
- Range: 12-245 mm.

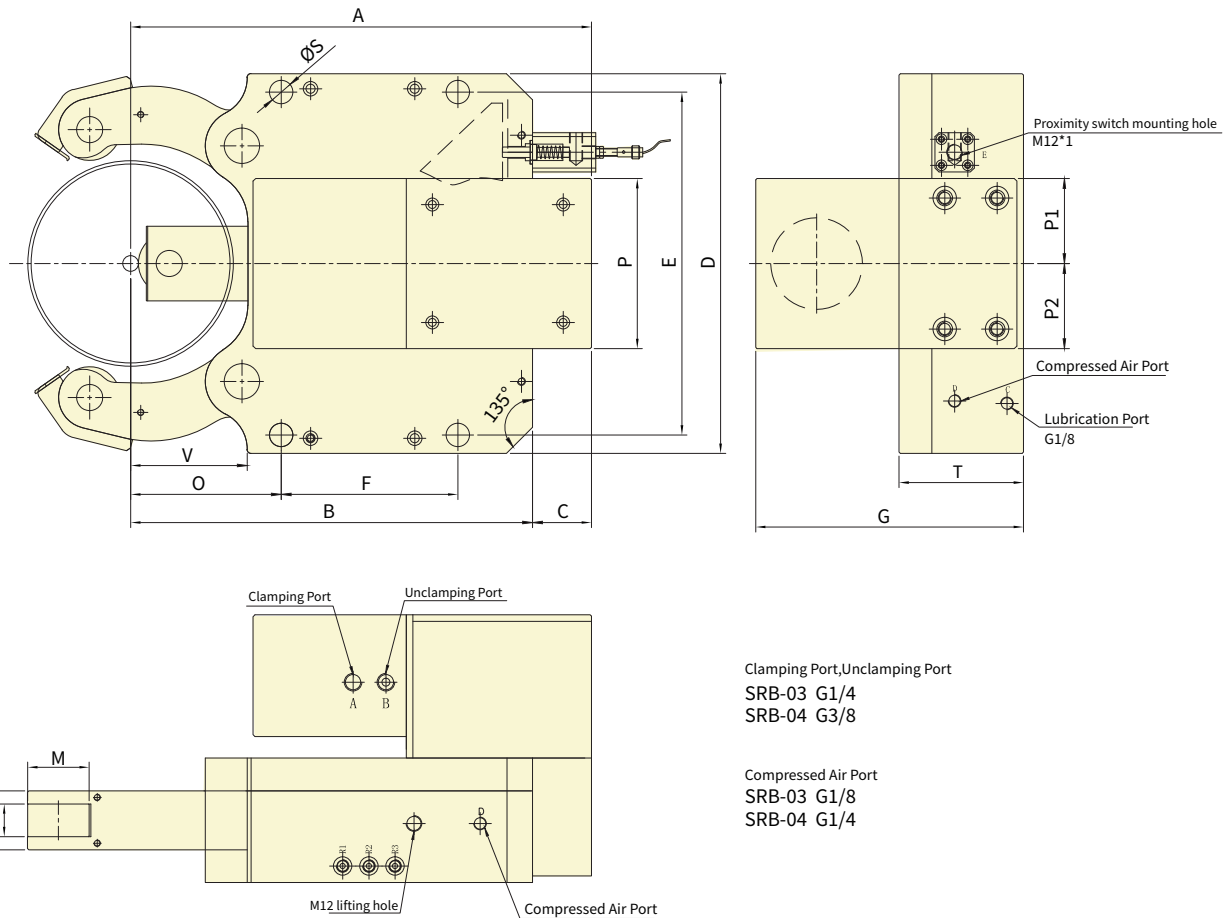

Subject to technical changes

SPECIFICATIONS

Model	Eff. piston area	Chuck. Dia. Max.	Chuck. Dia. Min.	Max. clamping force	Max. roller surface speed	Max. pressure	Clamping accuracy	Repeat accuracy	clamping weight	Weight
	cm ²	mm	mm	kN (kgf)	M/min.	bar	mm	mm	kg	kg
SRB-03	38.5	152	12	10(1019)	850	55	0.04	0.007	1000	44
SRB-04	63.5	245	30	15(1529)	750	75	0.05	0.007	1500	115

DIMENSIONS

Model	A	B	C	D	E	F	G	O
SRB-03	352	307	45	290	262	135	204.5	115
SRB-04	480	448	32	405	365	240	245	146

Model	K	L (Width of rollers)	M (Diameter of rollers)	P	P1	P2	S	T	V
SRB-03	45	25	47	130	65	65	18	95	89
SRB-04	60	25	52	150	75	75	23	110	128