


XYBT-BBT40GPCI4L120



- Provide the center coolant and the side coolant.
- Select the side coolant must to use the collet with coolant slot.
- C type Chuck is used for central outlet.
- Select the PIN Collet.
- Coolant can be sprayed directly into the edge of tool for quick cooling and remove the steel chip.
- At 2.5 magnification, the clamping accuracy is less than or equal to 0.003 mm.

BT BBT 40

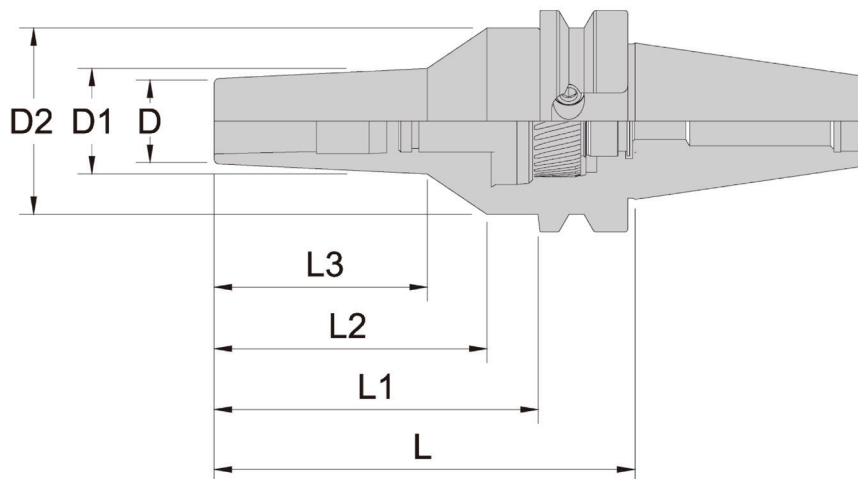

Subject to technical changes

SPECIFICATIONS

MODEL	Range(d)	L	L1	L2	L3	L4	D	D1	D2	D3
XYBT40GPC14L120	4~14	120	93	78	61	-	24	30	53	-
XYBBT40GPC14L120	4~14	120	93	78	61	-	24	30	53	-

MODEL	min ⁻¹ G2.5	Spanner	Recommend Torsion	Torque Wrench	Center Coolant	Side Coolant	Pin Collet
XYBT40GPC14L120	20000	4MM	10NM		V	V	V
XYBBT40GPC14L120	20000	4MM	10NM		V	V	V