



- 提供4油路 / 4通道及5油路 / 5通道設計，可依需求訂製多路獨立油壓通道。
- 適用於夾緊與鬆開等雙向油壓控制，確保動作精準且可靠，提升作業效率。
- 各通道採用平衡式機械密封。
- Available in 4-port / 4-channel and 5-port / 5-channel configurations, with customizable multi-channel hydraulic options upon request.
- Designed for bidirectional hydraulic control such as clamping and unclamping, ensuring precise and reliable operation to enhance productivity.
- Each channel adopts a balanced mechanical seal structure.
- 油路配置、通道數與安裝介面皆可依需求客製化，亦可支援不同介質。
- Customizable hydraulic circuits, number of passages, and mounting interface; supports various media.

Model:RJ-4E

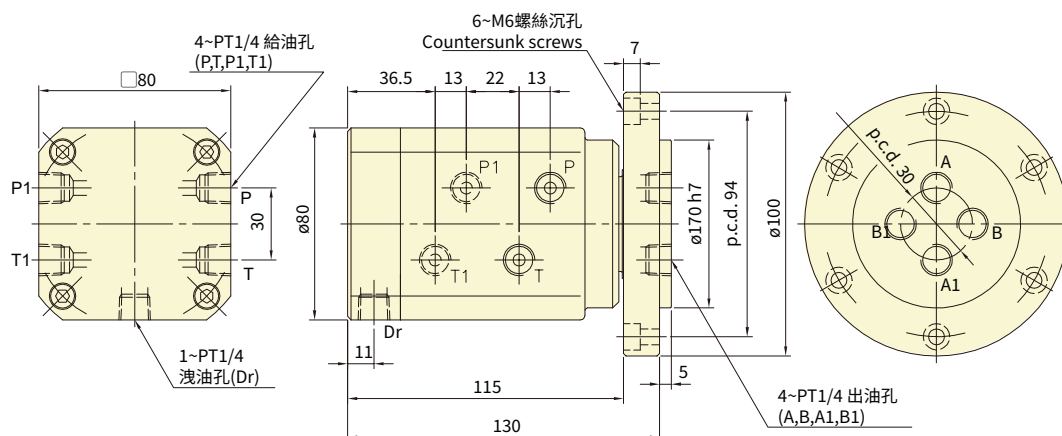

Model:RJ-5E

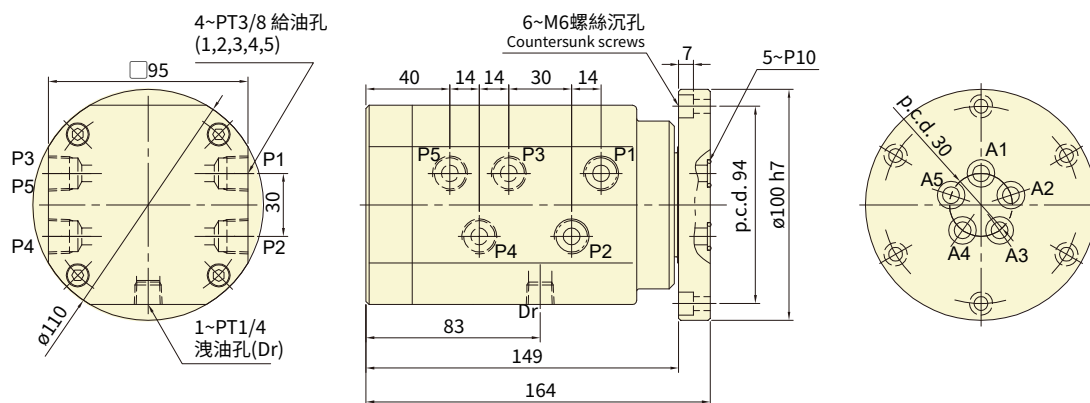

保留規格修改的權利 Subject to technical changes

技術規格 SPECIFICATIONS

型號	分流數	最高迴轉數(r.p.m.)	最高使用壓力 (kgf/cm ²)	重量 (kg)
Model	Distributing	Max. speed (r.p.m.)	Max. pressure (kgf/cm ²)	Weight (kg)
RJ-4E	4 in / 4 out	3500	35	4.5
RJ-5E	5 in / 5 out	3500	35	7.5