





- Simple, concise, and lightweight design.
- Rear pull positioning clamping, with a stopper block mechanism. Equipped with radial clamping and axial fine-tuning torque, it can precisely position the workpiece's material entry length, ensuring more accurate length control.
- The stopper block and dust cover can be interchanged, allowing for through-hole applications and dustproof functionality.
- J is the hole diameter of blank draw nut.
- K is the maximum thread specification and it could be customize.



With the material stop mechanism in place, the workpiece does not shift backward during clamping, although there may be slight scuff marks on the surface.

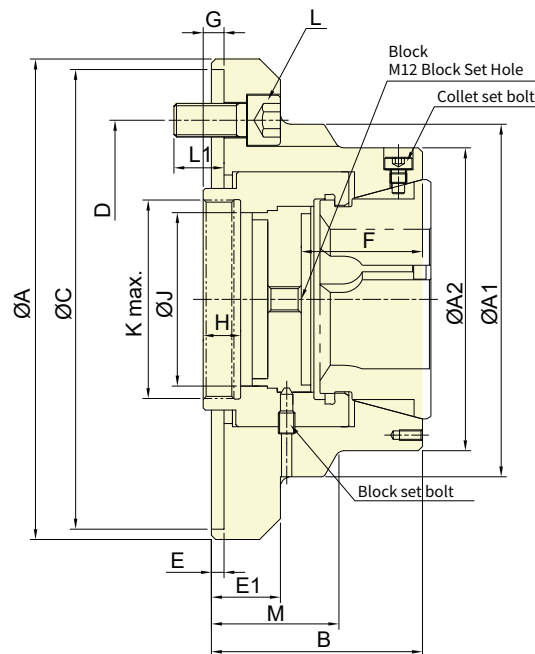

Subject to technical changes

SPECIFICATIONS

Model	Plunger stroke	Max. Chucking Capacity			Max. D.B. pull	Max. clamping force	Max. speed	Weight	Matching steel collet	Matching Cyl.	Max. pressure
		Round	Hexagom	Square							
	mm	mm	mm	mm	kN (kgf)	kN (kgf)	min ⁻¹ (r.p.m.)	kg			MPa (kgf/cm ²)
CME-80	4.5	5~80	8~68	8~56	50.0(5100)	115(11730)	6500	13.6	RG-80	TK-A1287	2.3(23)

DIMENSIONS

Model	A	A1	B	C (H6)	D	E	E1	F	G max.	G min.	H	J	K max.	L	L1	M
CME-80	230	170	101	220	171.4	6	33	58	12	7.5	18	83	M95x2	3~M16x35	24	61