





- 精簡輕量設計，結構簡單。
- 前推夾持，搭配擋料塊機構，徑向夾持零位移，有效控制工件進給長度。
- 搭配AUTOGRIP橡膠筒夾，避免工件被推動，保護工件表面。
- 擋料塊與防塵蓋可互換，兼具通孔加工與防屑功能，適用於副主軸夾持，降低夾持拉壓力。
- Compact and lightweight design with simplified structure.
- Dead length clamping with a built-in work stop ensures zero axial movement for precise workpiece positioning.
- Compatible with AUTOGRIP rubber collets to prevent forward push and protect the workpiece surface.
- Interchangeable work stop and dust cover for through-hole machining and chip protection. Ideal for sub-spindle clamping with reduced axial clamping force.
- J 值為連結螺帽末車製螺牙時的孔徑。
K max 值為連結螺帽可車製螺牙之最大規格，可依實際需求訂製。
- J is the hole diameter of blank draw nut.
K is the maximum thread specification and it could be customize.

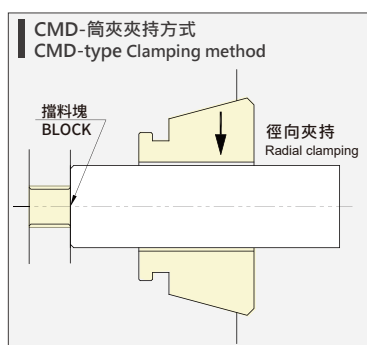

夾緊時，工件不會往前位移。
When clamping, the workpiece does not shift forward.

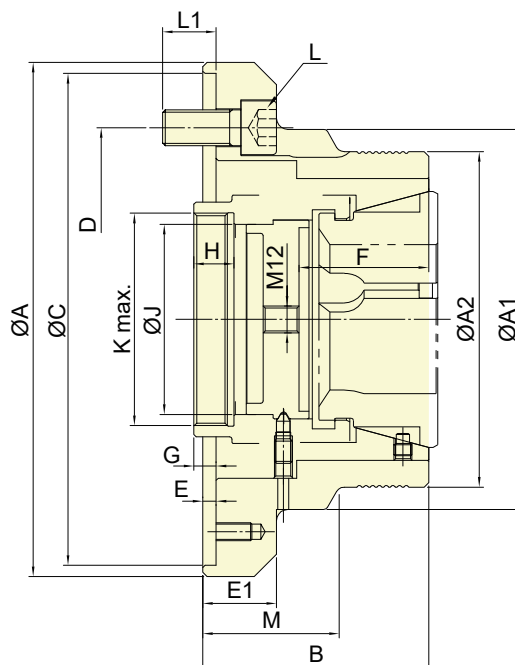

保留規格修改的權利
Subject to technical changes

技術規格 SPECIFICATIONS

型號	套筒行程	最大夾持能力 Max. Chucking Capacity			容許最大入力	最大夾持力	最高迴轉數	重量	使用筒夾	適用迴轉缸	最大使用壓力
Model	Plunger stroke	圓棒 Round	六角材 Hexagom	方材 Square	Max. D.B. pull	Max. clamping force	Max. speed	Weight	Matching steel collet	Matching Cyl.	Max. pressure
	mm	mm	mm	mm	kN (kgf)	kN (kgf)	min ⁻¹ (r.p.m.)	kg			MPa (kgf/cm ²)
CMD-80	4.5	5~80	8~68	8~56	50.0(5100)	115(11730)	6500	6.3	RG-80	TK-A1287	2.3(23)

外型尺寸 DIMENSIONS

Model	A	A1	A2	B	C (H6)	D	E	E1	F	G max.	G min.	H	J	K max.	L	L1	M
CMD-80	230	170	150	101	220	171.4	6	33	58	12.5	8	18	85	M95x2	3~M16X35	24	61