



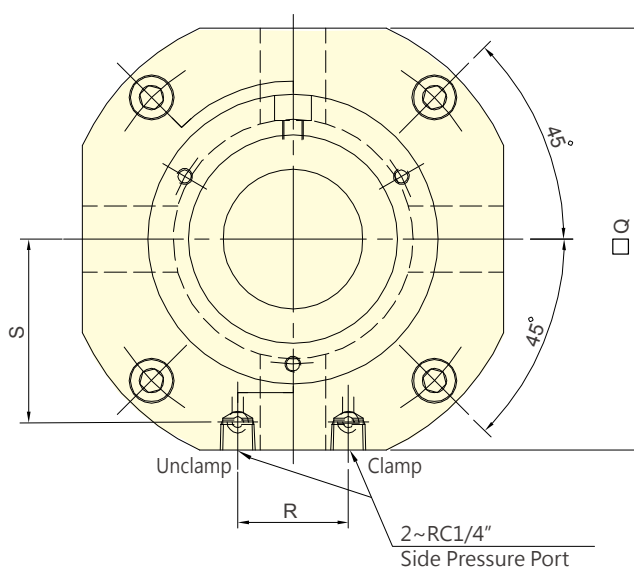

- Build-in cylinder, ideal for drilling machines, milling machines and machining centers
- Work with AUTOGRIP's rubber collet(RG series), quick change and saving runtime.
- Two modes for the media supply: side-supply mode or baseplate-supply mode.

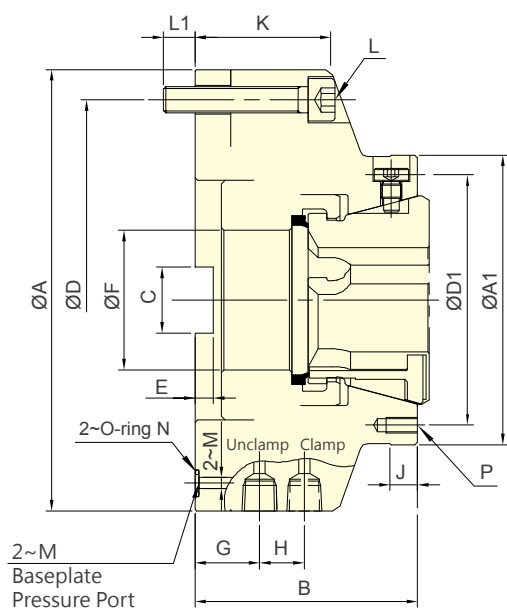

Subject to technical changes

SPECIFICATIONS

Model	Jaw stroke(Dia.)	Max. Chucking Capacity			Max. clamping force		Max. pressure		Weight	Matching steel collet
		Round	Hexagom	Square	Pneumatic	Hydraulic	Pneumatic	Hydraulic		
Model	mm	mm	mm	mm	kN (kgf)	kN (kgf)	MPa (kgf/cm ²)	MPa (kgf/cm ²)	kg	
SCB-52	± 0.5	4~52	7~45	7~36	8.2(837)	101(10300)	0.6(6)	4.0(40)	8.6	RG-52
SCB-65	± 0.5	4~65	8~56	8~46	10(1020)	105(10700)	0.6(6)	4.2(42)	10.2	RG-65

DIMENSIONS

Model	A (g6)	A1	B	C	D	D1	E	F	G	H
SCB-52	175	110	84.5	25	152	95	7	53	24.5	17
SCB-65	192	130	94	30	169	114	9	66	26.5	20

Model	J	K	L	L1	M	N	P	Q	R	S
SCB-52	10	51.5	4~M10	12	4.2	P7	3~M6x12	160	42	69.5
SCB-65	10	61.5	4~M10	12.5	4.2	P7	3~M6x12	175	50	77