


- This wedge-driven synchronous clamp features a long jaw stroke, providing continuous high clamping force during the machining process.
- The sliding surfaces are hardened and precision ground, with direct lubrication to enhance performance.
- High clamping accuracy and excellent dust protection.

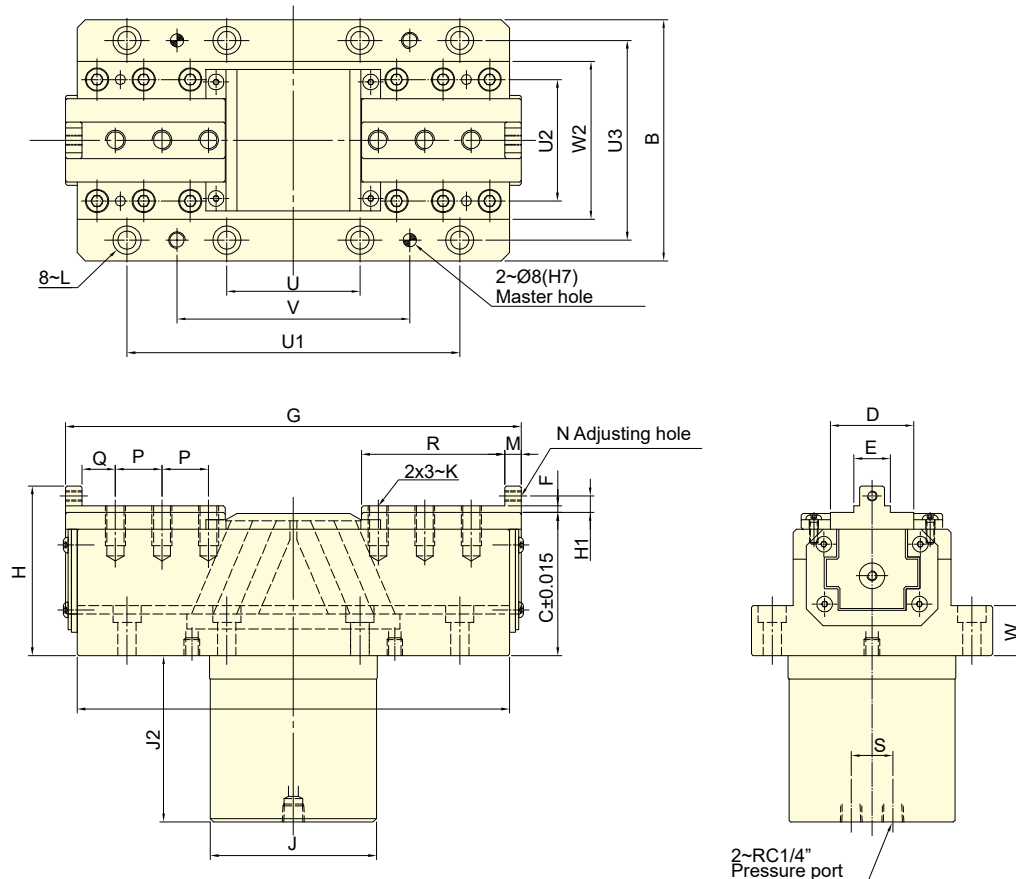

Subject to technical changes

SPECIFICATIONS

Model	Eff. Piston area		Jaw stroke(Dia.)	Clamping capacity	Max. clamping force	Max. pressure	Weight
	Extend	Retract					
	cm ²	cm ²					
CW-30	31.10	24.10	30	150	34.3(3500)	7.0(70)	32

DIMENSIONS

Model	A	B	C	D	E(h6)	F	Gmax	Gmin	H	H1	J	J2	K	L	M
CW-30	260	145	86	50	22	4	304	274	102	10	100	100	M12x1.75	M10	10

Model	N	P	Q	R	S	U	U1	U2	U3	V	W	W2
CW-30	M6x1	28	20	86	25	80	200	120	73	140	30	30