



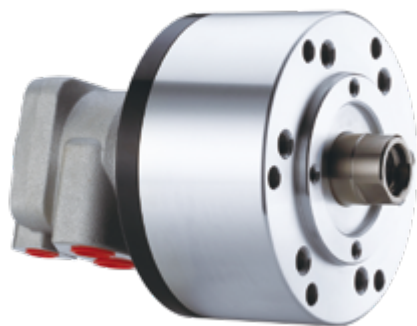

- 短型・高速・輕量型迴轉油壓缸。
- 安裝時可由後端鎖固之。
- For short form, light weight and high speed rotary cylinder.
- Can screw it from the rear end of the cylinder when mounting.
- 洩油孔配管務必單獨接回油壓槽，以避免產生背壓。
- The drain port should be independently connected to oil tank to avoid back pressure.

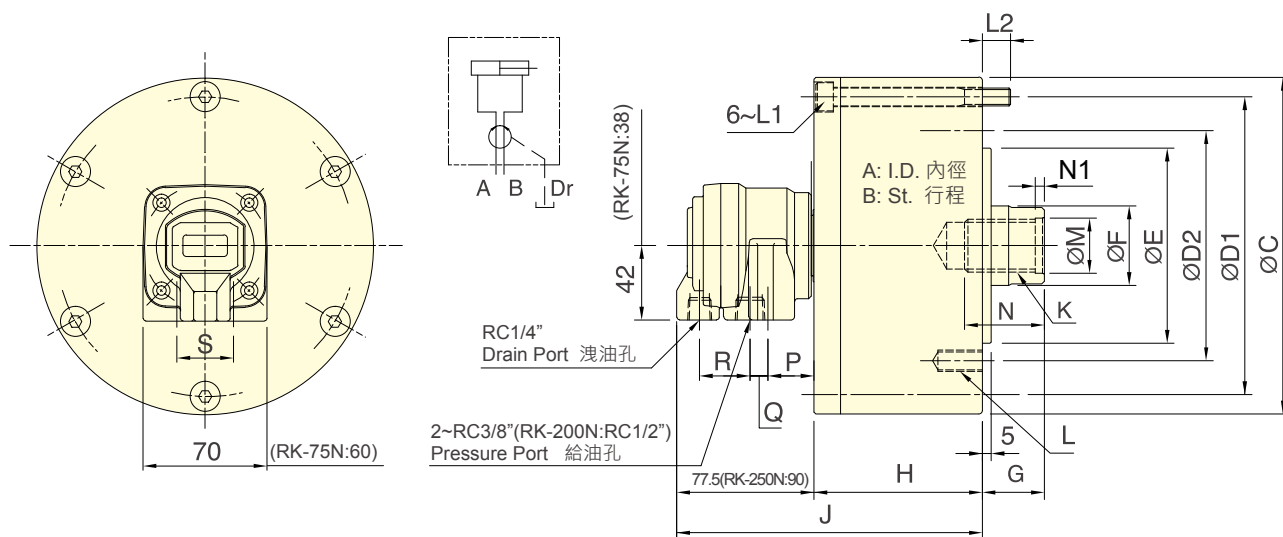

保留規格修改的權利  
Subject to technical changes

### 技術規格 SPECIFICATIONS

| 型號             | 活塞面積 Eff. piston area |                 | 行程            | 最高迴轉數                      | 最高使用壓力                    | I                 | 重量     |
|----------------|-----------------------|-----------------|---------------|----------------------------|---------------------------|-------------------|--------|
| Model          | 伸側(Extend)            | 拉側(Retract)     | Piston stroke | Max. speed                 | Max. pressure             | Moment of inertia | Weight |
|                | cm <sup>2</sup>       | cm <sup>2</sup> | mm            | min <sup>-1</sup> (r.p.m.) | MPa(kgf/cm <sup>2</sup> ) | kg·m <sup>2</sup> | kg     |
| <b>RK-75N</b>  | 44.2                  | 37.1            | 15            | 6000                       | 4.0(40)                   | 0.01              | 2.8    |
| <b>RK-100N</b> | 78.5                  | 71.5            | 20            | 6000                       | 4.0(40)                   | 0.03              | 4.3    |
| <b>RK-125N</b> | 122.7                 | 113.1           | 25            | 6000                       | 4.0(40)                   | 0.05              | 6.8    |
| <b>RK-150N</b> | 176.7                 | 160.8           | 30            | 5500                       | 4.0(40)                   | 0.09              | 9.4    |
| <b>RK-200N</b> | 314.1                 | 290.4           | 35            | 5500                       | 4.0(40)                   | 0.28              | 15.3   |
| <b>RK-250N</b> | 469.1                 | 436.0           | 60            | 2000                       | 5.0(50)                   | 0.40              | 45.2   |

### 外型尺寸 DIMENSIONS

| Model          | A   | B  | C   | D1  | D2  | E (h7) | F  | G max. | G min. | H   | J     | K       | L         | L1      | L2   | M (H8) | N  | N1 | P  | Q  | R    | S  |
|----------------|-----|----|-----|-----|-----|--------|----|--------|--------|-----|-------|---------|-----------|---------|------|--------|----|----|----|----|------|----|
| <b>RK-75N</b>  | 75  | 15 | 107 | 90  | 90  | 65     | 30 | 45     | 30     | 57  | 134.5 | M20x2.5 | 6~M8x16   | M8x60   | 12   | 21     | 35 | 5  | 28 | 10 | 27.5 | 26 |
| <b>RK-100N</b> | 100 | 20 | 132 | 115 | 100 | 80     | 30 | 45     | 25     | 72  | 149.5 | M20x2.5 | 6~M10x20  | M8x75   | 12   | 21     | 35 | 5  | 26 | 10 | 28.5 | 32 |
| <b>RK-125N</b> | 125 | 25 | 160 | 140 | 130 | 110    | 35 | 50     | 25     | 82  | 159.5 | M24x3.0 | 6~M12x20  | M8x85   | 12   | 25     | 45 | 5  | 26 | 10 | 28.5 | 32 |
| <b>RK-150N</b> | 150 | 30 | 190 | 170 | 130 | 110    | 45 | 55     | 25     | 95  | 172.5 | M30x3.5 | 12~M12x24 | M10x100 | 15.5 | 32     | 45 | 5  | 26 | 10 | 28.5 | 32 |
| <b>RK-200N</b> | 200 | 35 | 245 | 220 | 145 | 120    | 55 | 70     | 35     | 115 | 192.5 | M36x4.0 | 12~M16x30 | M10x125 | 21   | 38     | 60 | 5  | 30 | 6  | 28.5 | 28 |
| <b>RK-250N</b> | 245 | 60 | 307 | 275 | 220 | 160    | 65 | 85     | 25     | 165 | 255   | M42x3.0 | 6~M20x2.5 | M16x175 | 28   | 45     | 65 | 12 | 37 | 18 | 6    | -  |