




- Rotary valve is used for clamping cylinder on rotary table.
- Through unique design, it can make the rotary housing be rotated light force and is free from oil leaking.
- I Type is a single circuit which controls the clamping.
- II Type is a double circuit which separately controls the clamping.
- The drain port of RV type should be independently connected to oil tank to avoid back pressure.

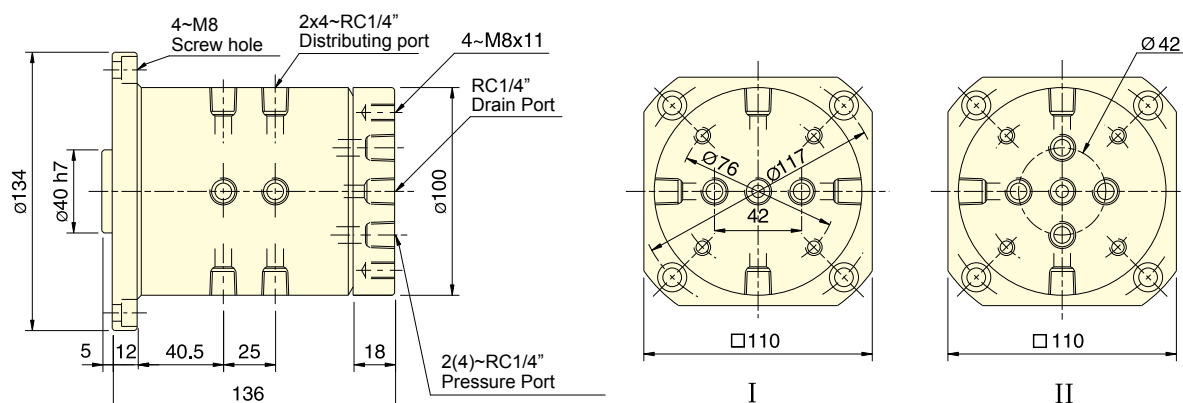


Subject to technical changes

SPECIFICATIONS

Model	Distributing	Max. pressure	Weight
		MPa(kgf/cm ²)	kg
RV-31H	4 (by order)	4.0 (40)	7.4

Note:RV can be custom-made.

AIR ROTARY VALVE

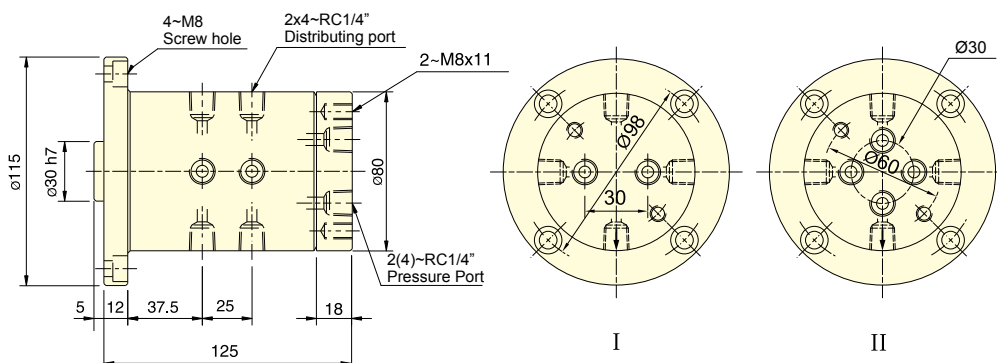

Subject to technical changes

SPECIFICATIONS

Model	Distributing	Max. pressure	Weight
		MPa(kgf/cm ²)	kgs
RV-A31H	4 (by order)	0.8(8)	4.8

Note:RV-A can be custom-made.