




- 單通道多介質設計，兼容氣體與水兩種不同介質。
- 高效密封系統，採用耐磨損且耐腐蝕的密封材料，確保在高速旋轉下無洩漏，結構緊湊，易於安裝。
- Single-channel design for multi-medium transmission, compatible with both air and coolant (water-based fluids).
- High-performance sealing system with wear- and corrosion-resistant sealing materials ensures zero leakage under high-speed rotation.
- Compact construction for easy integration and installation.
- 無介質通過時，請勿運轉。
- Do not operate the rotary joint without medium flowing through the passage.

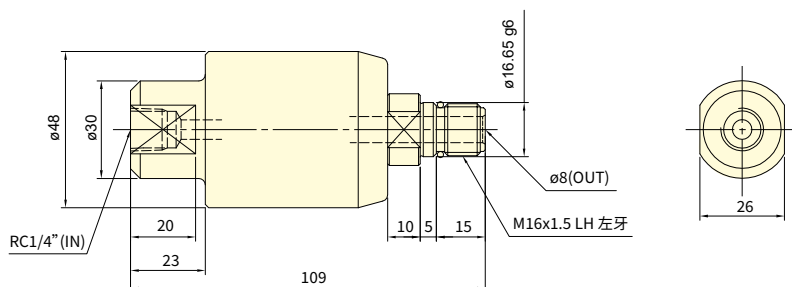


保留規格修改的權利 Subject to technical changes

技術規格 SPECIFICATIONS

型號	注水PV 限制值 (MPa·r/m.)	注氣PV 限制值 (MPa·r/m.)	吐出量 (使用壓力 50 kgf/cm ²)	最高使用迴轉數 (r.p.m.)	注水最高使用壓力 MPa(kgf/cm ²)	注氣最高使用壓力 MPa(kgf/cm ²)	重量(kg)
Model	Coolant connection PV Limit value (MPa·r/m.)	Air connection PV Limit value (MPa·r/m.)	Delivery amount (at 50 kgf/cm ²)	Max. speed (r.p.m.)	Coolant connection Max. pressure MPa(kgf/cm ²)	Air connection Max. pressure MPa(kgf/cm ²)	Weight (kg)
RJ-52	8000	3200	28l/min	3000	4.0(40)	0.8(8.0)	0.5



- 高轉速，高壓力用冷卻液迴轉接頭。
- 內部止水閥使用超硬合金及精密陶瓷相配對，耐磨耗特性佳。
- Coolant joint for high speed, high pressure. Usable for oil and water-soluble coolant.
- Seal bushing inside is made of cemented carbide and ceramics, which provide higher wear-resistance.
- 注水部無流體通過時，請勿運轉。
- The joint should not run without liquid through coolant port.

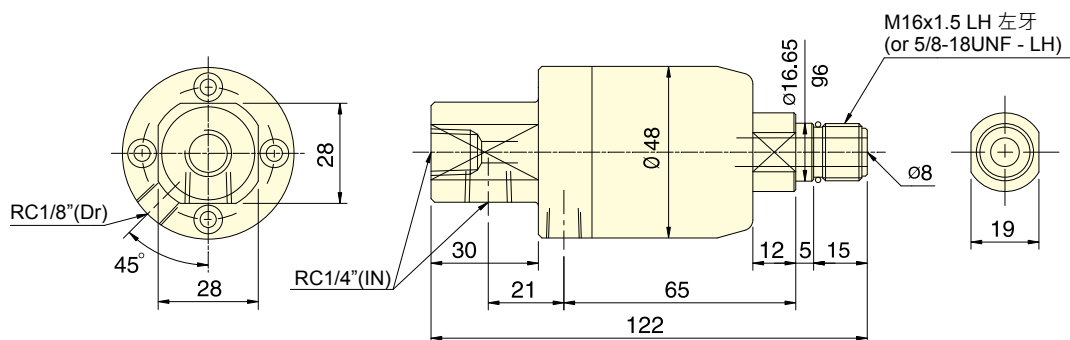

保留規格修改的權利 Subject to technical changes

技術規格 SPECIFICATIONS

型號	PV限制值 MPa· r/m	最高使用壓力 MPa(kgf/cm ²)	吐出量 (使用壓力 50 kgf/cm ²)	最高使用迴轉數(r.p.m.)	重量 (kg)
Model	PV Limit value MPa· r/m	Max. pressure MPa(kgf/cm ²)	Delivery amount (at 50 kgf/cm ²)	Max. speed (r.p.m.)	Weight (kg)
RJ-80	14400	6.0(60)	28 l/min	8000	0.5