




- 外型長度精短，重量輕巧。
- 高轉數，高壓力用冷卻液迴轉接頭。
- 內部止水閥使用超硬合金及精密陶瓷相配對，耐磨耗性特佳。
- 運轉時如無流體通過，則止水閥自動脫離，使止水閥不致乾磨而損壞。
- Short form, light weight coolant rotating joint.
- Coolant joint for high speed, high pressure. Usable for oil and water-soluble coolant.
- Seal bushing inside is made of cemented carbide and ceramics, which provide higher wear-resistance.
- The seal will depart automatically if no liquid passes during operation, and will not be damaged due to dry touching.
- 最小啟動壓力 4kgf/cm²。
- Min. pressure is 4kgf/cm².

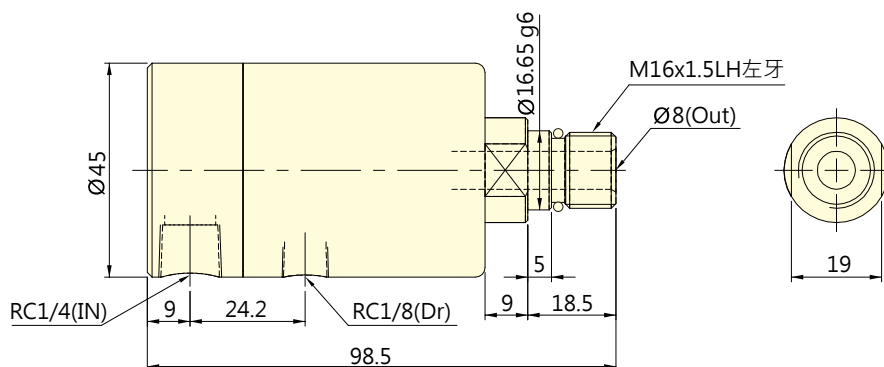

保留規格修改的權利 Subject to technical changes

技術規格 SPECIFICATIONS

型號	PV限制值 MPa· r/m	最高使用壓力 MPa(kgf/cm ²)	吐油量 (使用壓力 50 kgf/cm ²)	最高使用迴轉數 (r.p.m.)	最小啟動壓力 MPa(kgf/cm ²)	重量 (kg)
Model	PV Limit value MPa· r/m	Max. pressure MPa(kgf/cm ²)	Delivery amount (at 50 kgf/cm ²)	Max. speed (r.p.m.)	Min. pressure MPa(kgf/cm ²)	Weight (kg)
RJ-92	17500	7.0(70)	28 l/min	10000	0.4(4)	0.46