



- Available Configurations: 4-Channel (2 Hydraulic + 2 Air) and 5-Channel (4 Hydraulic + 1 Air)
 - Enables clamping and unclamping control; applicable to workpiece detection, tool air-blow cleaning, and similar automation functions.
 - Ideal for rotary tables on mill-turn machines and multi-axis machining centers.
 - Features high-performance sealing technology to prevent leakage of oil, ensuring long-term operational stability.
- Customizable Air and hydraulic configurations, number of passages, and mounting interface and supports dual media
 - Optional integration with optical scales is available for enhanced precision and system synchronization.

Model:RJ-22HA

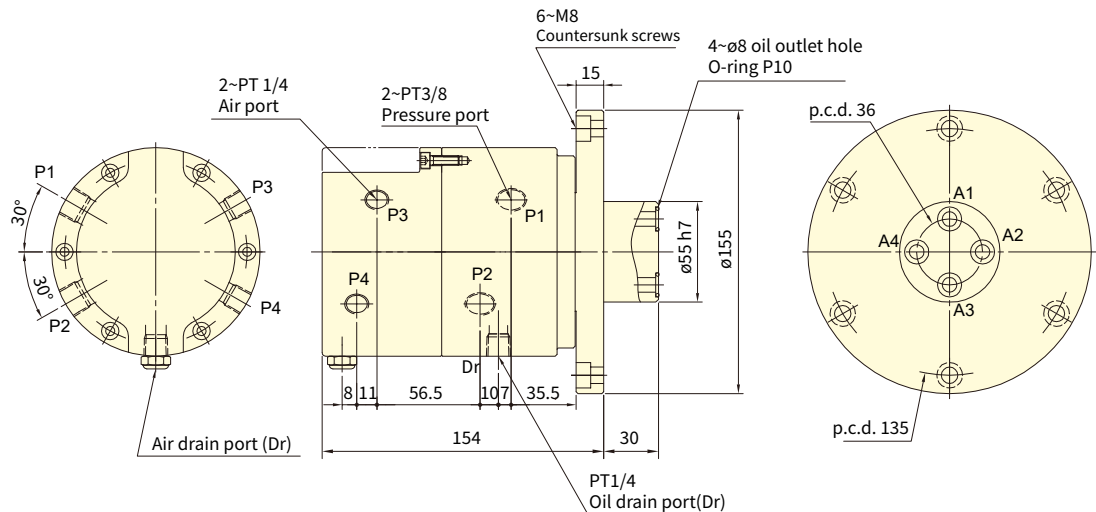

Model:RJ-41HA

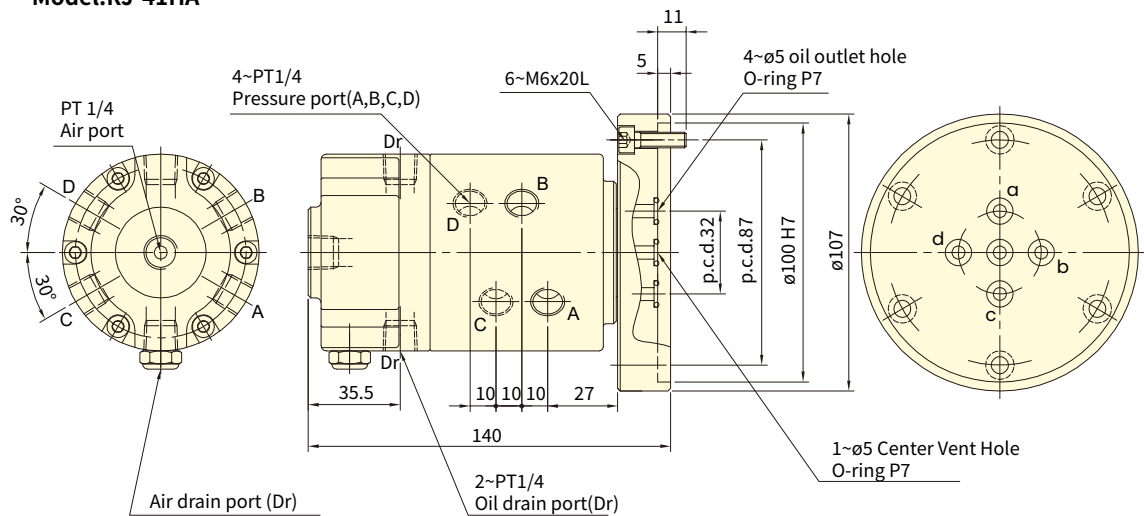

Subject to technical changes
SPECIFICATIONS

Model	Distributing	Max. speed (r.p.m.)	Max. pressure MPa(kgf/cm ²)		Weight (kg)
			Pneumatic	Hydraulic	
RJ-22HA	2 Hydraulic + 2 Air	1000	8	60	10.5
RJ-41HA	4 Hydraulic + 1 Air	3000	8	50	2.95