




- High Clamping Force and High Concentricity.
- Enclosed Main Body Design.
- Central Lubrication: Grease/Oil/Oil + Air.
- Built-in Check Valve Locking Mechanism.
- Compressed Air Waterproof and Chip-Resistant Design: Prevents chips from entering the main body during machining.
- Chip Guarding Device.

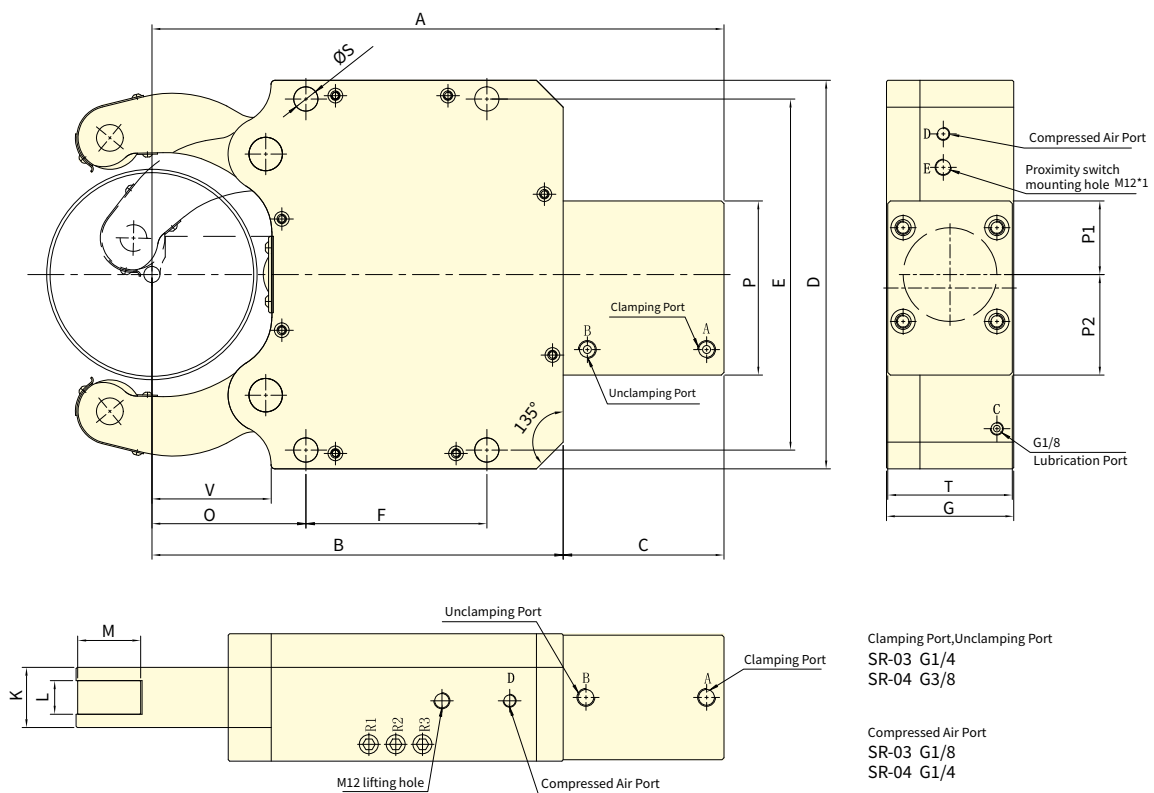

Subject to technical changes

SPECIFICATIONS

Model	Eff. piston area cm ²	Chuck Dia. Max. mm	Chuck Dia. Min. mm	Max. clamping force kN (kgf)	Max. roller surface speed M/min.	Max. pressure bar	Clamping accuracy mm	Repeat accuracy mm	clamping weight kg	Weight kg
SR-02A	19.6	102	8	4.59(468)	900	30	0.02	0.005	459	19
SR-03	38.5	152	12	10.2(1040)	750	60	0.02	0.005	1000	39
SR-04	63.5	245	30	15(1529)	760	75	0.05	0.007	1500	98

DIMENSIONS

Model	A	B	C	D	E	F	G	O
SR-02A	279	197	82	205	170	85	70	70
SR-03	427	307	120	290	262	135	95	115
SR-04	603	448	155	405	365	240	110	146

Model	K	L (Width of rollers)	M (Diameter of rollers)	P	P1	P2	S	T	V
SR-02A	35	19	35	102	51	51	14	68	54
SR-03	45	25	47	130	55	75	18	93	89
SR-04	60	25	52	150	75	75	23	105	128