




- Precision Type.
- Sealed body design for low maintenance.
- Programmable, suitable for automated assembly lines.
- Equipped with water/air sprays for debris, coolant-proof, and chip-proof.
- Range: 12-245mm.

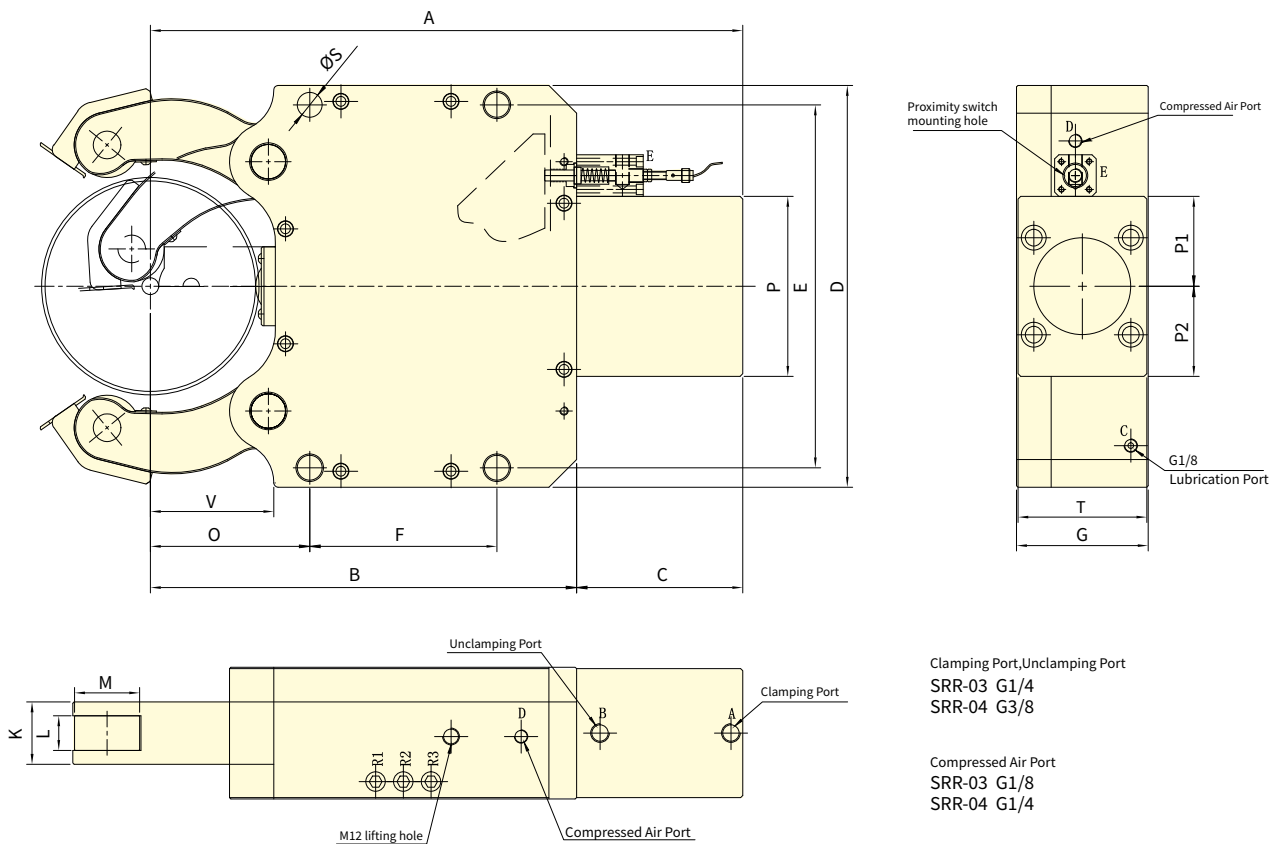

Subject to technical changes

## SPECIFICATIONS

| Model         | Eff. piston area<br>cm <sup>2</sup> | Chuck Dia. Max.<br>mm | Chuck Dia. Min.<br>mm | Max. clamping force<br>kN (kgf) | Max. roller surface speed<br>M/min. | Max. pressure<br>bar | Clamping accuracy<br>mm | Repeat accuracy<br>mm | clamping weight<br>kg | Weight<br>kg |
|---------------|-------------------------------------|-----------------------|-----------------------|---------------------------------|-------------------------------------|----------------------|-------------------------|-----------------------|-----------------------|--------------|
| <b>SRR-03</b> | 38.5                                | 152                   | 12                    | 10.2(1040)                      | 750                                 | 65                   | 0.04                    | 0.007                 | 1000                  | 39           |
| <b>SRR-04</b> | 63.5                                | 245                   | 30                    | 15(1529)                        | 760                                 | 60                   | 0.05                    | 0.007                 | 1500                  | 98           |

## DIMENSIONS

| Model         | A   | B   | C   | D   | E   | F   | G   | O   |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|
| <b>SRR-03</b> | 427 | 307 | 120 | 290 | 262 | 135 | 95  | 115 |
| <b>SRR-04</b> | 603 | 448 | 155 | 405 | 365 | 240 | 110 | 146 |

| Model         | K  | L<br>(Width of rollers) | M<br>(Diameter of rollers) | P   | P1 | P2 | S  | T   | V   |
|---------------|----|-------------------------|----------------------------|-----|----|----|----|-----|-----|
| <b>SRR-03</b> | 45 | 25                      | 47                         | 130 | 65 | 65 | 18 | 93  | 89  |
| <b>SRR-04</b> | 60 | 25                      | 52                         | 150 | 75 | 75 | 23 | 105 | 128 |