


1	規格 Spec.	樞行程 mm	爪行程(直徑) mm	夾持直徑 Chucking Dia. mm	容許油壓缸推力 Max D.B. pull	最大夾持力 Max clamping force	最高迴轉數 Max speed	重量 Weight	客戶確認 Confirmed
	型號 Model	Plunger Stroke	Jaw Stroke (Dia.)	最大 Max.	最小 min.	kgf	r.p.m.	kg·m ²	
	3P-10A8	25	8.8	254	24	11000	4000	0.30	
A		*訂購時請將圖面連同訂單一併回傳。 *Please send back with order while ordering. Serration Pitch 排齒距 1.5							
B		max.139 min.114							
C		36							
D		3~M8x20L							
		p.c.d 190							
		7°7'30"							
		Ø254							
		Ø220							
		Ø139.72							
		Ø45							
		Ø34							
		max.51.1 min.46.7							
		p.c.d171.45							
		max.35.25 min.12.75							
		30							
		3x2~M12x30L							
		43							
		40							
		110							
		15° 15°							
		AUTOG RIP TAIWAN							
		佳賀 2026-01-21 正式發行							

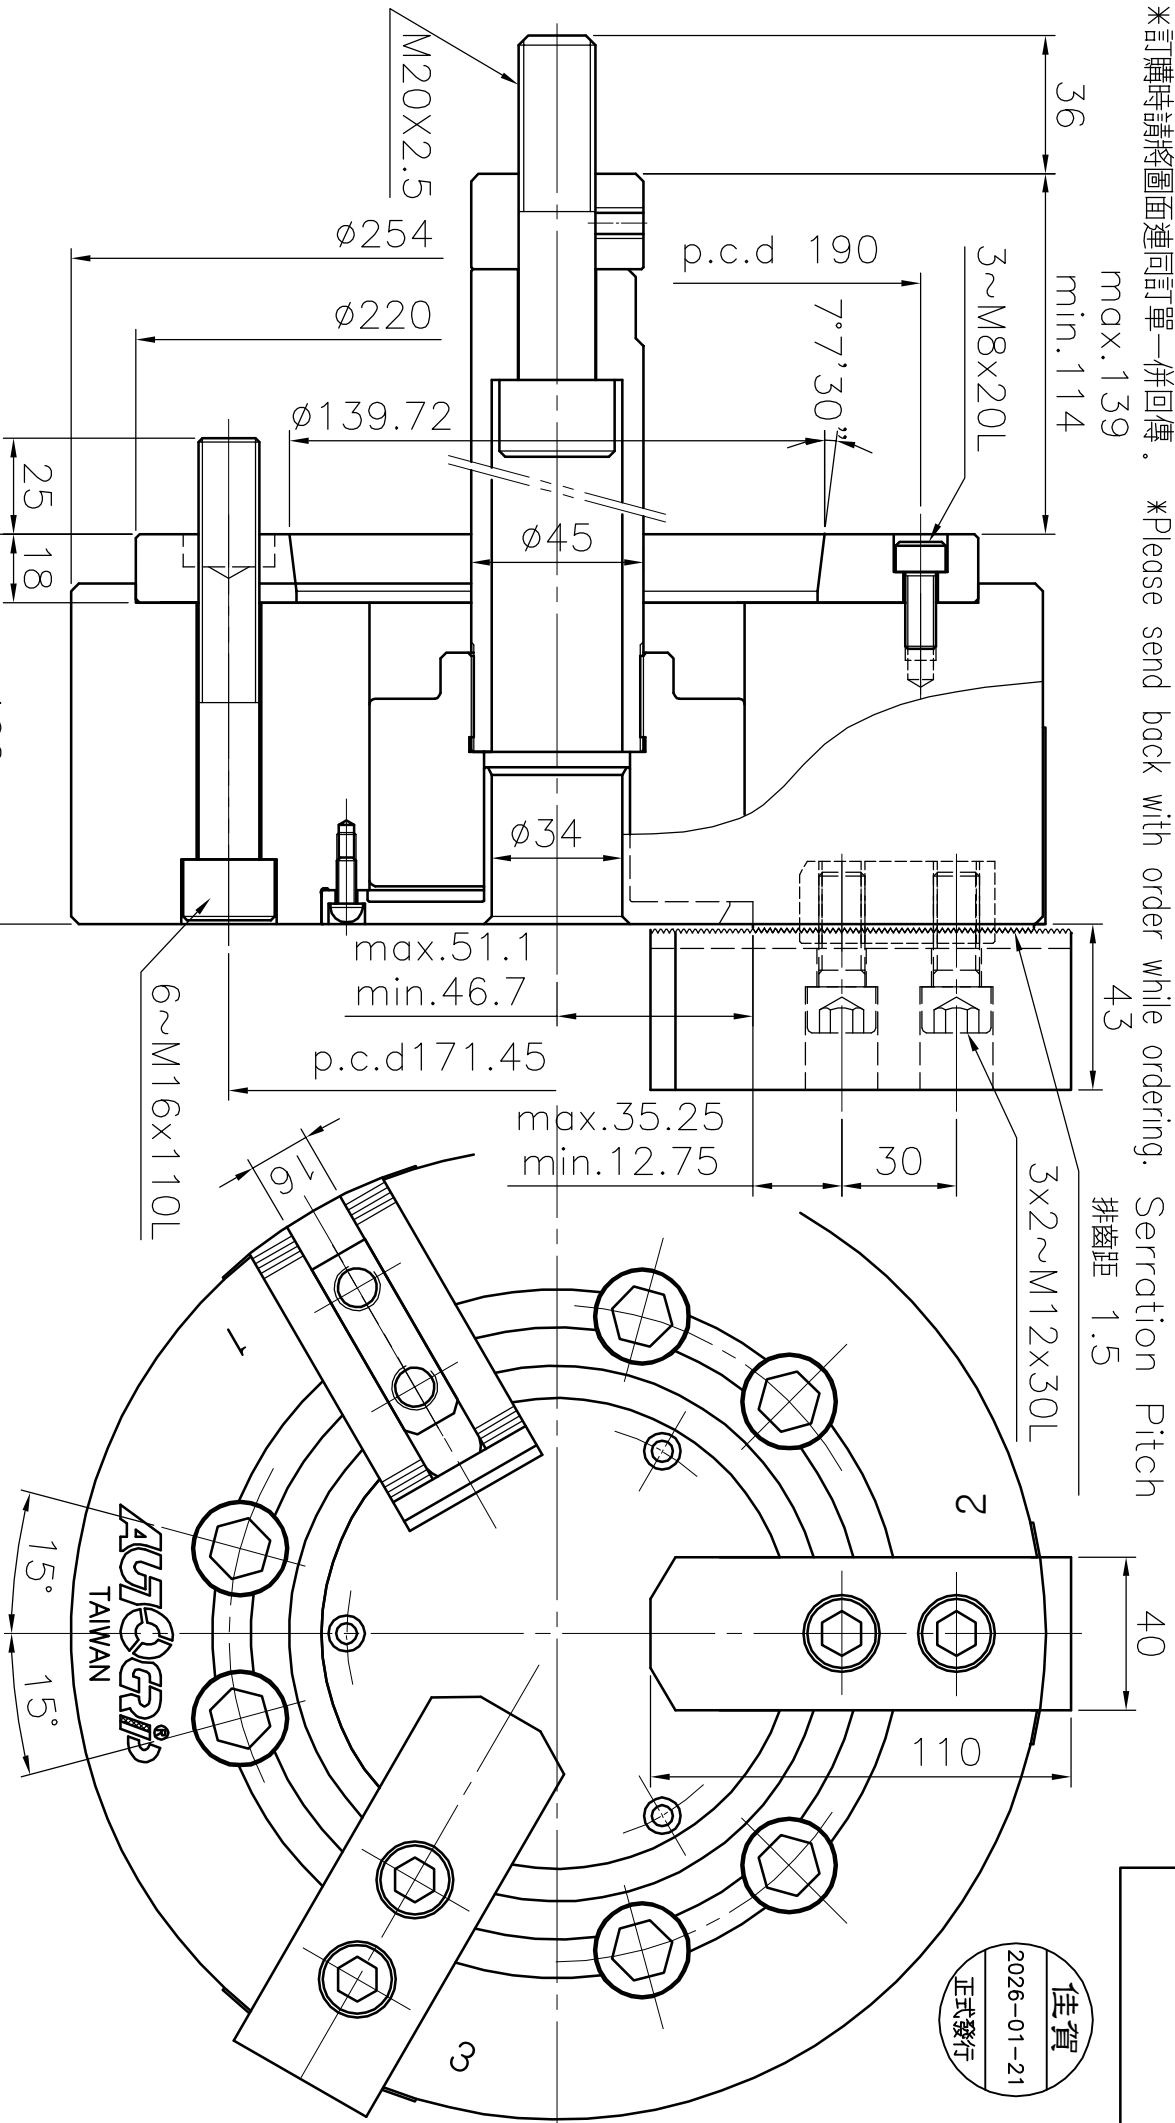

三爪中實動力夾頭

*為確保產品品質日益精進，敝公司擁有設計變更之權。 *Subject to technical changes.

A4h 版本 C

品號 AKP1310110G 製圖

日期 2007-07-30 檔案 \CHK\CF-3P-10

AUTOG RIP 佳賀精機股份有限公司
AUTOG RIP MACHINERY CO., LTD.