




- 楔形二爪大貫通孔徑，特別適合異形物的夾持。
 - 摺動面均經硬化及精密研磨，並直接潤滑。
 - 高剛性結構及高夾持精度。
 - WEDGE-HOOK type 2-jaw with the large through-hole.
 - Matching surfaces of all parts hardened, ground and lubricated directly.
 - High rigidity and high clamping accuracy.
- J 值為連結螺帽未車製螺牙時之孔徑。
K Default 值為未指定規格之出廠值。
K max 值為連結螺帽可車製螺牙之最大規格，可依實際需求訂製。
- J is the hole diameter of blank draw nut.
If not notified, AUTOGRIP will adopt the K Default as K value.
K is the maximum thread specification and it could be customize.

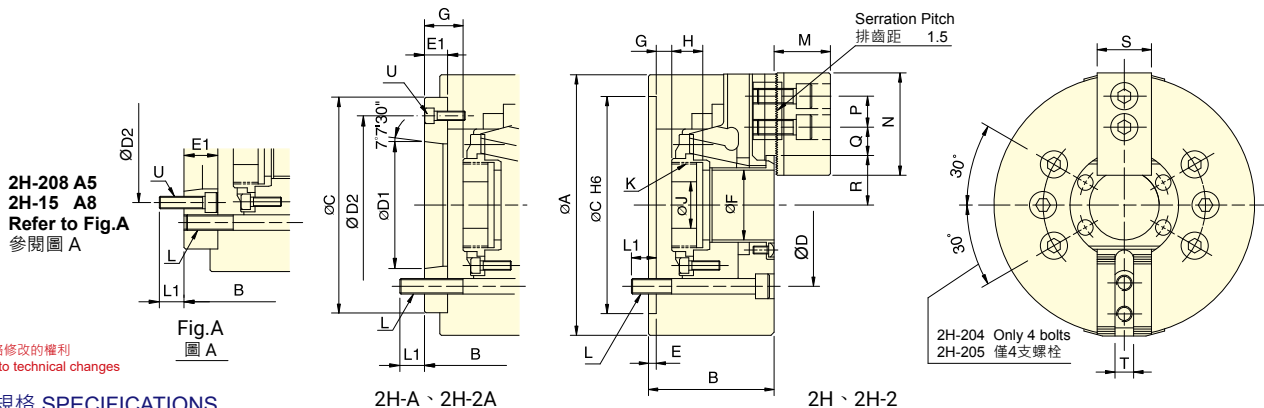

保留規格修改的權利
Subject to technical changes

技術規格 SPECIFICATIONS

型號	通孔徑	楔心行程	爪行程 (直徑)	夾持直徑 Chuck Dia.	容許最大入力	最大夾持力	最高迴轉數	I	重量	適用迴轉缸	最大使用壓力
Model	Thru-hole (Dia.)	Plunger stroke	Jaw stroke (Dia.)	最大 Max. 最小 Min.	Max. D.B. pull	Max. Clamping force	Max. speed	Moment of inertia	Weight	Matching cyl.	Max. pressure
	mm	mm	mm	mm	kN (kgf)	kN (kgf)	min ⁻¹ (r.p.m.)	kg·m ²	kg		MPa (kgf/cm ²)
2H-204 A4	32	13	5.5	113 7	9.2(940)	19.4(1980)	8000	0.012	4.2 4.8	TK-A528	1.3(13)
2H-205 A4	39	13	5.5	138 10	11.4(1167)	32(3260)	7000	0.02	6.8 7.6	TK-A533	1.6(16)
2H-206 A5	53	14	6	170 13	15.5(1580)	44.4(4530)	6000	0.06	13.1 14.9	TK-A646	1.6(16)
2H-208 A5	66	18	7.6	210 17	23.1(2360)	57.3(5840)	5000	0.17	21.3 24.2	TK-A853	1.8(18)
2H-208 A6	66	18	7.6	210 17	23.1(2360)	57.3(5840)	5000	0.17	21.3 22.4	TK-A853	1.8(18)
2H-210 A8	86	21	8.9	260 37	32.9(3355)	87.7(8943)	4500	0.31	33.5 36.2	TK-A1075	2.2(22)
2H-12 A8	91	25	10.6	304 34	36.7(3740)	95.8(9780)	3300	0.70	59.7 62.7	TK-A1291	1.7(17)
2H-15 A8	120	25	10.6	381 50	46.9(4790)	119.6(12200)	2500	2.42	115 129	TK-A1512	1.5(15)
2H-15 A11	120	25	10.6	381 50	46.9(4790)	119.6(12200)	2500	2.34	115 122	TK-A1512	1.5(15)

外型尺寸 DIMENSIONS

Model	A	B	C	D	D1	D2	E	E1	F	G max.	G min.	H	J
2H-204 A4	113	59	83	85	70.6	63.51	82.6	4	28	32	3.5 31.5	-9.5 18.5	17.5 12
2H-205 A4	138	60	71	110	82.6	63.51	96	4	15	39	1 16	-12 3	20 12
2H-206 A5	170	81	91	140	104.8	82.56	116	5	15	53	13 28	-1 14	17.5 20
2H-208 A5	210	91	109	170	133.4	82.56	104.8	5	23	66	16.5 39.5	-1.5 21.5	20 30
2H-208 A6	210	91	103	170	133.4	106.38	150	5	17	66	16.5 33.5	-1.5 15.5	20 30
2H-210 A8	260	102	115	220	171.4	139.72	190	5	18	86	10.5 28.5	-10.5 7.5	25 45
2H-12 A8	304	110	122	220	171.4	139.72	190	6	18	91	10 28	-15 3	28 50
2H-15 A8	381	133	160	300	235	139.72	171.4	6	33	120	11 44	-14 19	39 60
2H-15 A11	381	133	149	300	235	196.87	260	6	22	120	11 33	-14 8	39 60

Model	K max.	K Default	L	L1	M	N	P	Q max.	Q min.	R max.	R min.	S	T	U
2H-204 A4	M38x1.5	M32x1.5	4~M10	16 15	24	52	14	12.75	6.75	25	22.25	23	10	3~M10
2H-205 A4	M45x1.5	M40x1.5	4~M10	14.5 14.5	31	62	14	20.25	6.75	29.5	26.75	25	10	3~M6
2H-206 A5	M60x2	M55x2	6~M10	16 16	37	73	20	22.75	9.25	36	33	31	12	3~M6
2H-208 A5	M75x2	M60x2	6~M12	17 18	38	95	25	23.7	10.2	45.7	41.9	35	14	6~M10
2H-208 A6	M75x2	M60x2	6~M12	17 15	38	95	25	23.7	10.2	45.7	41.9	35	14	3~M6
2H-210 A8	M95x2	M85x2	6~M16	20 22	43	110	30	32.2	12.7	56.5	52.05	40	16	3~M8
2H-12 A8	M100x2	M100x2	6~M16	23 25	51	130	30	44.75	14.75	61.3	56	50	21	3~M8
2H-15 A8	M130x2 M115x2	M130x2 M100x2	6~M20	30 24	63	165	43	49.75	19.75	77.5	72.2	62	25.5 or 22	6~M16
2H-15 A11	M130x2	M130x2	6~M20	30 28	63	165	43	49.75	19.75	77.5	72.2	62	25.5 or 22	3~M10

紅色數據為 2H-A、2H-2A 型之寸法 (The dimensions and the specifications of 2H-A、2H-2A type are in red data.)