




- linear Sensor installation drawing


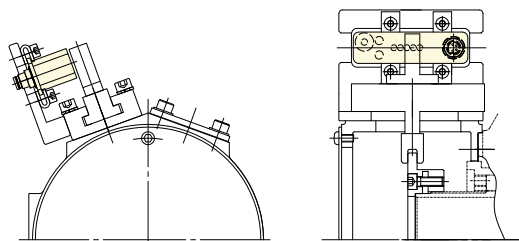


- The proximity switch and linear Sensor are optional.
- The proximity switch is optional.

Power supply	Switching cap.	Output type
DC 10/30V	100mA	NPN


- Terminal Connections

+V	OP1	OV
BROWN	BLACK	BLUE

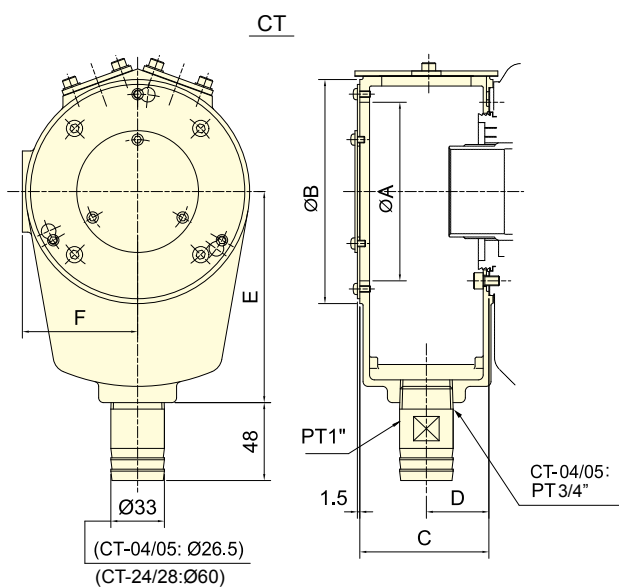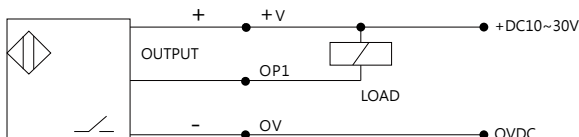

Subject to technical changes

Coolant Collector

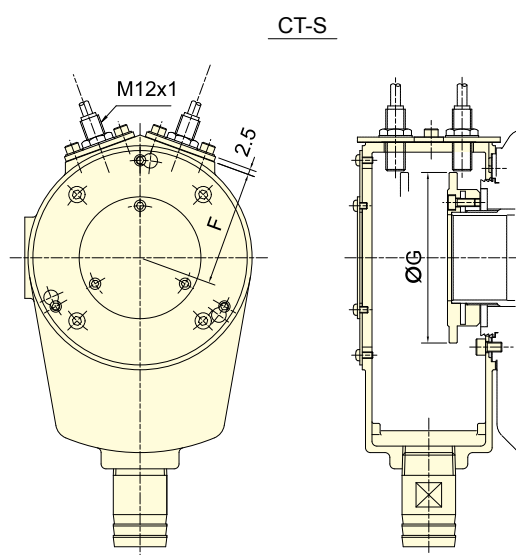

Coolant Collector with Detecting Ring

DIMENSIONS

Model	A	B	C	D	E	F	G	Weight (kg)		Matching cyl.
								CT	CT-S	
CT-04/CT-04S	87	110	60	29	110	57	79	0.9	1.1	TH-428
CT-05/CT-05S(TH)	87	110	60	29	110	57	86	0.9	1.1	TH-A536
CT-05/CT-05S(TK)	87	110	60	29	110	57	86	0.9	1.1	TK-A528, TK-A533
CT-06/CT-06S	100	125	74	36	120	64.5	94	1.2	1.6	TK-C643, TK-A646, TK-B646, TK-C646, TR-646
CT-08/CT-08S	110	138	80	39	130	71	105	1.3	1.8	TK-B846, TK-A853, TK-B853, TR-853
CT-K10/CT-K10S	158	185	88	43	160	94.5	145	1.9	2.6	TK-A1068, TK-A1075, TK-A1078, TR-1075
CT-12/CT-12S	158	185	88	43	160	94.5	145	1.9	2.6	TK-A1287, TK-A1291, TR-1291
CT-15/CT-15S	206	235	100	50	210	121	190	3.1	4.3	TK-A1511, TK-A1512, TK-A1512-35
CT-21/CT-21S	226	255	100	50	210	131	210	3.3	4.6	TK-2114
CT-24/CT-24S	250	270	100	50	230	154	248	3.5	5.5	TK-2416, TK-2416L
CT-28/CT-28S	310	330	100	50	260	181	305	4.3	7.2	TK-2820



CT-SB/CT-SBS

COOLANT COLLECTOR WITH STROKE CONTROL



- The proximity switch and linear Sensor are optional.
- Drain port Ø40 and Ø60 are optional product.
- Drain port Ø60 only use to CT-S08B,CT-S10B,CT-S12B.



- The proximity switch is optional.

Power supply	Switching cap.	Output type
DC 10/30V	100mA	NPN

- Terminal Connections


+V	OP1	OV
BROWN	BLACK	BLUE

- linear Sensor installation drawing

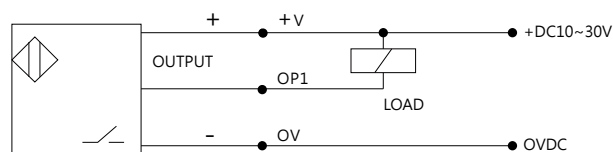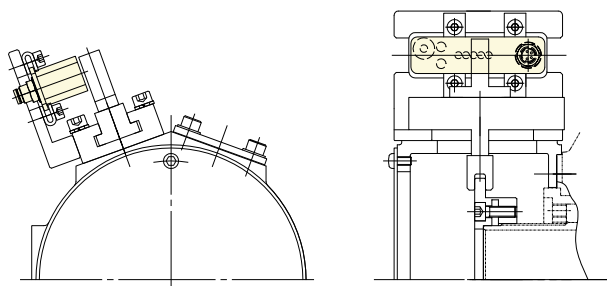


CT-SB

CT-SBS




Ø40 Drain port




Ø60 Drain port

Only use to
CT-S08B/CT-S10B/CT-S12B

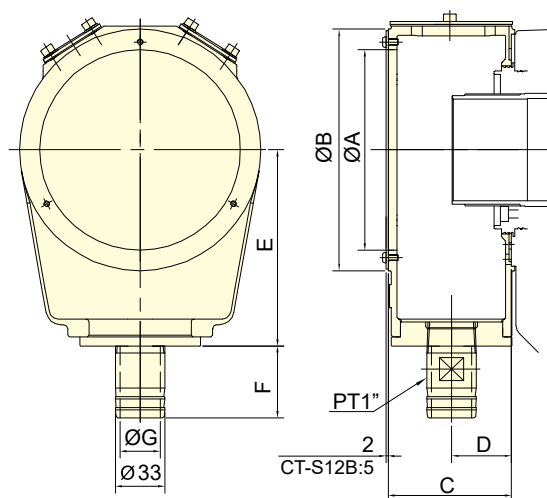

Coolant Collector

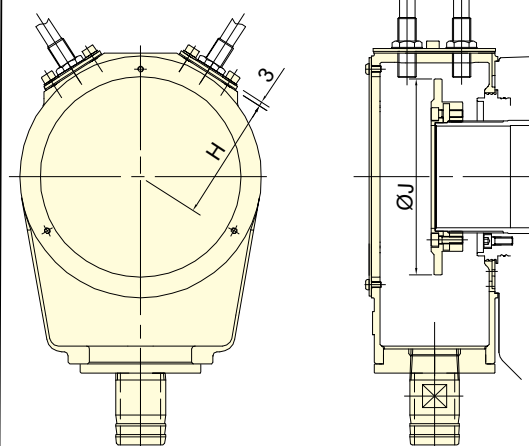

Coolant Collector with Detecting Ring

Subject to technical changes

DIMENSIONS

Model	A	B	C	D	E	F	F1	F2	G	G1	G2	H	J	Weight (kg)		Matching cyl.
														CT-SB	CT-SBS	
CT-S05B/CT-S05BS	97	120	68.3	33.3	96	49.6	56	-	25	32	-	62	86	1.1	1.6	TS-539, TR-539
CT-S08B/CT-S08BS	133	160	82	40	130	49.6	56	63	25	32	52	82	130	0.9	1.4	TS-866
CT-S10B/CT-S10BS	160	188	88	43	148	49.6	56	63	25	32	52	96	148	1.16	2.9	TS-1081
CT-S12B/CT-S12BS	205	234	87	43.5	171	49.6	56	63	25	32	52	121	190	4.3	5.6	TS-1210