



- Available in 4-port / 4-channel and 5-port / 5-channel configurations, with customizable multi-channel hydraulic options upon request.
- Designed for bidirectional hydraulic control such as clamping and unclamping, ensuring precise and reliable operation to enhance productivity.
- Each channel adopts a balanced mechanical seal structure.
- The hydraulic circuit layout, number of passages, and mounting interface can all be customized according to requirements.

Model:RJ-4E

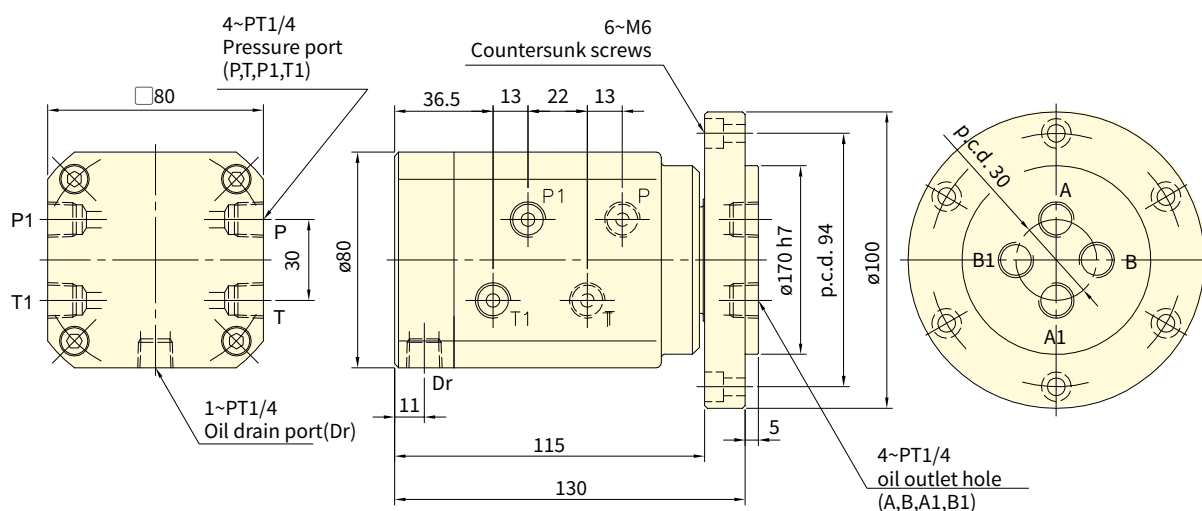

Model:RJ-5E

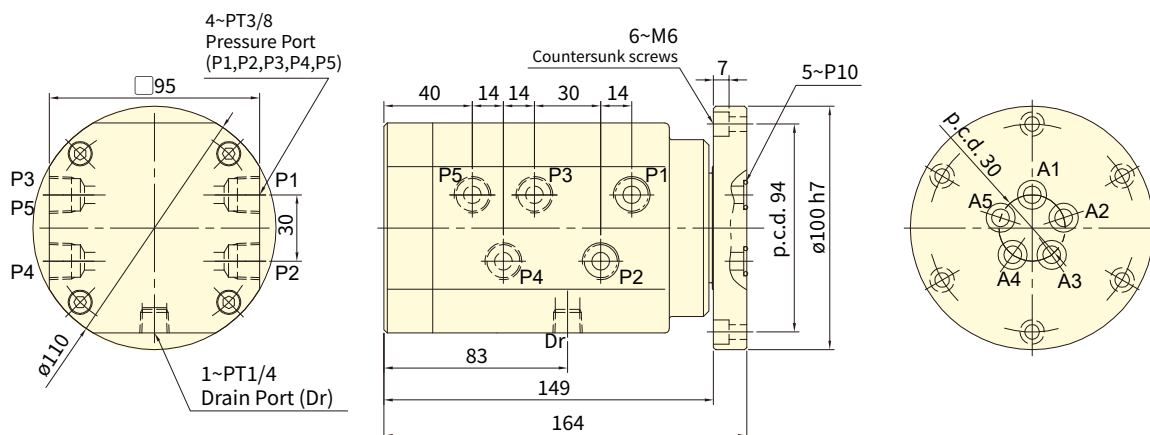

Subject to technical changes

SPECIFICATIONS

Model	Distributing	Max. speed (r.p.m.)	Max. pressure (kgf/cm ²)	Weight (kg)
RJ-4E	4 in / 4 out	3500	35	4.5
RJ-5E	5 in / 5 out	3500	35	7.5